

FORM PTO-1390 (Modified)
(REV. 11/98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

28569.8300

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

To be assigned 09/763277

INTERNATIONAL APPLICATION NO.

PCT/JP99/04506

INTERNATIONAL FILING DATE

20 August 1999

PRIORITY DATE CLAIMED

20 August 1998

TITLE OF INVENTION

LASER POWER CONTROL DEVICE AND OPTICAL DISK APPARATUS

APPLICANT(S) FOR DO/EO/US

Chikashi INOKUCHI; Shigeru FURUMIYA; Yoshiyuki MIYABATA; Yuji HISAKADO; Atsushi MIYAZAKI; and
Toshiya AKAGI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☒ A copy of the International Search Report (PCT/ISA/210).
- ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☒ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
- ☒ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). **UNSIGNED**
- ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409)
- ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

1. Return Postcard
2. English Translation of Article 34 Amendments
3. English Translation of Reply to Written Opinion

NOTE: Please cancel claims 1-28 and substitute the claims in the Preliminary Amendment prior to calculating the filing fee in this application.

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) 09/763277 To be assigned		INTERNATIONAL APPLICATION NO. PCT/JP99/04506		J002 Rec'd PCT/PTO 20 FEB 2001 ATTORNEY'S DOCKET NUMBER 28569.8300	
---	--	--	--	--	--

21. The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :					
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO					
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)					
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	3 - 20 =	0	x \$18.00	\$0.00	
Independent claims	1 - 3 =	0	x \$80.00	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$990.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				\$0.00	
SUBTOTAL =				\$990.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$990.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$990.00	
				Amount to be: refunded \$	
				charged \$	

☐ A check in the amount of _____ to cover the above fees is enclosed.

☒ Please charge my Deposit Account No. **19-2814** in the amount of **\$990.00** to cover the above fees.
 A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **19-2814** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Michael K. Kelly
 SNELL & WILMER, LLP
 One Arizona Center
 400 E. Van Buren Street
 Phoenix, AZ 85004-2202
 P: (602) 382-6291
 F: (602) 382-6070

SIGNATURE
 Michael K. Kelly
 NAME
 32,848
 REGISTRATION NUMBER
 February 20, 2001
 DATE

IN THE UNITED STATES PATENT AND *PATENT*
TRADEMARK OFFICE

Inventor(s):	Chikashi INOKUCHI, et al.	Docket No:	28569.8300
Int'l Serial No:	PCT/JP99/04506	Int'l Filing Date:	August 20, 1999
Priority Date:	August 20, 1998	Serial No.:	To Be Assigned
Group Art Unit:	To Be Assigned	Examiner:	To Be Assigned
TITLE:	LASER POWER CONTROL DEVICE AND OPTICAL DISK APPARATUS		

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to calculating the filing fee for this application and prior to examination of the above-identified application, please enter the following preliminary amendment:

In the Claims:

Please cancel claims 1 through 28.

Please add the following new claims 29 through 31:

29. (New) An optical disk apparatus for recording or reproduction on an optical disk including a track in which a recording region is wobble-processed, comprising:

optical means for reading information from the optical disk or recording information in the optical disk;

signal generation means for generating a tracking error signal indicating a scanning state of the optical means on the track included in the optical disk by the optical means;

extraction means for extracting a wobble signal from the tracking error signal;

amplitude detection means for detecting a wobble envelope voltage representing an amplitude of the wobble signal based on the wobble signal extracted by the extraction means;

a bias generation circuit for outputting an average value of the wobble envelope voltage as a bias voltage;

an arithmetic unit for calculating a positive square root of the wobble envelope voltage with respect to the bias voltage assumed as being "1", and outputting a reciprocal of the calculated positive square root as a calculation result; and

recording power control means for controlling recording power when the optical means records the information in the optical disk, based on the calculation result.

30. (New) An optical disk apparatus according to claim 1, wherein:

the optical disk apparatus is capable of recording data in a guiding groove portion and an inter-guiding groove portion of the optical disk;

the optical disk apparatus further comprises identification means for identifying whether a track scanned by the optical means is in the guiding groove portion or the inter-guiding groove portion; and

the bias generation circuit generates two types of bias voltages, a bias voltage for recording in the guiding groove portion and a bias voltage for recording in the inter-guiding groove portion, based on an identification result by the identification means.

31. (New) An optical disk apparatus according to claim 1, wherein the arithmetic unit calculates a positive square root of the wobble envelope voltage with respect to the bias voltage assumed as being "1", and provides a value obtained by adding "1" to a result of subtraction of the positive square root from "1" as a calculation result.

REMARKS

Applicant respectfully requests that the Examiner consider the foregoing claims contained in this amendment. If the examiner has any questions or comments regarding this

Serial No.: To be assigned
Title: LASER POWER CONTROL DEVICE AND
OPTICAL DISK APPARATUS

Preliminary Amendment or the present application, then he or she is invited to telephone the undersigned attorney.

Respectfully submitted,

Dated: 20 Feb '01

By: Michael K. Kelly
Michael K. Kelly
Reg. No. 32,848

SNELL & WILMER, L.L.P.
One Arizona Center
400 East Van Buren Street
Phoenix, AZ 85004
Phone: (602) 382-6291
Fax: (602) 382-6070

[illegible]

09/763277

JC02 Rec'd PCT/PTC 2 0 FEB 2001

P21051

LASER POWER CONTROL DEVICE AND OPTICAL DISK APPARATUS

09/763277-051101

16/PRTS

P21051

- 1 -

DESCRIPTION

LASER POWER CONTROL DEVICE AND OPTICAL DISK APPARATUS

5

TECHNICAL FIELD

The present invention relates to a laser power control device which is used for recording/reproduction of digital disks and to an optical disk apparatus which uses the laser power control device, and relates to a laser power control device for controlling a laser power and an optical disk apparatus which uses the laser power control device.

10

BACKGROUND ART

15

In a recordable/reproducible DVD-RAM disk, the inside of the disk is divided into a plurality of zones. The number of rotations is constant within each zone, but is different between different zones. In general, such a system is called a zone CLV. Each zone is divided into a plurality of sectors, and each sector is formed by a data recording region in which information can be recorded and an address region in which the address of the sector has been previously recorded. Another feature of this system is that the data recording region can extend over both a guiding groove region of the disk (hereinafter, referred to as "groove") and a region between the guiding groove regions (hereinafter, referred to as "land"). Address information is recorded in address portions so that a pair of address portions are offset from each other and each address portion extends over the groove and the land.

20

25

30

In order to smoothly perform reproduction in the

09/763277, 051101

data recording region based on the above special format,
a single wave corresponding to a divisional component of
a clock component (hereinafter, referred to as a "wobble")
is formed in an address region and a data recording region
while cutting a disk. When reproducing from the disk, the
wave component is detected as a tracking error signal.

Hereinafter, a conventional optical disk
recording/reproduction device will be described.

Figure 11 is a block diagram of a conventional
optical disk recording/reproducing device 700. In
Figure 11, reference numeral 1 denotes a motor; reference
numeral 2 denotes an optical disk; reference numeral 3
denotes an optical head; reference numeral 4 denotes a
reproduction signal/servo signal detection circuit for
generating a reproduction signal, a focus error signal, and
a tracking error signal from an output signal obtained from
the optical head 3; reference numeral 5 denotes
focus/tracking control means for controlling the optical
head 3 by using a servo signal from the reproduction
signal/servo signal detection circuit 4 and for controlling
the motor 2; reference numeral 6 denotes a reproduction
signal binarizing circuit for binarizing the reproduction
signal; reference numeral 7 denotes a demodulator for
demodulating the binarized reproduction signal to generate
reproduction data; reference numeral 8 denotes a laser
driving circuit for driving a laser which is a light source
of the optical head 3; reference numeral 9 denotes a
recording signal generation circuit for generating a signal
for modulating laser light by the laser driving circuit based
on the data obtained after modulation; reference numeral 10
denotes a modulator for modulating data to be recorded so

as to generate a signal which is supplied to the recording
signal generation circuit 9; reference numeral 11 denotes
power control means for controlling the laser power during
recording/reproduction of data; reference numeral 12
5 denotes a gate signal generator for generating various gate
signals based on a clock of a reference clock generator 14;
reference numeral 13 denotes an error correction/address
detection device for detecting and correcting the error
amount of the reproduction data demodulated by the
10 demodulator 7 and for detecting an address in the same data
sequence; reference numeral 14 denotes the reference clock
generator for generating a reference clock for
recording/reproduction of data; reference numeral 15
denotes a CPU which gives the error correction/address
15 detection circuit a command to measure a BER (Bit Error Rate),
which can set the power in the recording power setting means,
and which manages a user interface.

Hereinafter, an operation of the optical disk
20 recording/reproduction device 700 having the above
structure will be described.

An output signal read out from the optical disk 2
by the optical head 3 is supplied to subsequent process
25 circuits as a reproduction signal, a focus error signal,
and a tracking error signal by the reproduction signal/servo
signal detection circuit 4. The focus error signal and the
tracking error signal are supplied to the focus/tracking
control means 5. The optical head 3 is controlled by the
30 focus/tracking control means 5 so as to follow the wavering
of the disk surface and decentration of the disk. The
reproduction signal is supplied to the reproduction signal
binarizing circuit 6, and the binarized data sequence and

a read clock which is in synchronization with the data are output to the demodulator 7. The reference clock generator 14 generates a reference clock which is necessary for modulating/demodulating data to be recorded/reproduced by this apparatus.

The demodulator 7 performs modulation using the supplied binarized data sequence and the read clock according to a demodulation rule, and outputs the demodulated data to the error correction/address detection device 13 using the reference clock. The output reproduction data is supplied to the subsequent error correction/address detection device 13, and an address position on a track is detected by the detection device 13. An address detection signal is supplied to the gate signal generator 12, and the gate signal generator 12 uses this signal as a position reference on the track to generate, using the gate signal, a signal which is necessary during recording/reproduction.

Data to be recorded is converted by the modulator 10 into a data sequence to be recorded according to a modulation rule. The data sequence obtained by the conversion is further converted by the recording signal generation circuit 9 into a signal for modulating laser light, and this signal is supplied to the laser driving circuit 8. The laser driving circuit 8 modulates the laser light which is a light source of the optical head 3 for recording data on the disk. The recording is performed at a recording power predetermined by the CPU 15.

An operation of the optical disk recording/reproducing device having the above structure

when recording is performed in a sector of a DVD-RAM disk is described with reference to Figure 12. Each zone of the DVD-RAM disk is divided into a plurality of sectors, and each sector includes a data recording region in which information can be recorded and an address region in which an address of the sector has been recorded. In Figure 12, a reproduction signal from the disk is shown in Figure 12(a); a corresponding tracking error signal is shown in Figure 12(b); a read gate signal, which is a representative gate signal necessary for reproduction of data/address, is shown in Figure 12(c); a detection signal of the address is shown in Figure 12(d); a recording gate signal, which is another representative gate signal necessary for recording is shown in Figure 12(e); and an operation gate signal of the modulator is shown in Figure 12(g).

A signal read out through the optical head 3 is output by the reproduction signal/servo signal detection circuit 4 as a reproduction signal shown in Figure 12(a) and a tracking error signal shown in Figure 12(b).

Assuming that the number of rotations of a disk in a zone N is equal to a target number of rotations, a read gate signal for reading an address of a target sector L is activated at timing (c)-2 in Figure 12(c) using an address detection signal for a sector previous to the target sector L in which data is to be recorded as a reference.

The demodulator 7 performs demodulation based on data from the reproduction signal binarizing circuit 6 and the read clock, and reading of an address is performed in the error correction/address detection device 13. When the address has been normally read out, the detection device 13

generates a signal as shown in Figure 12(d), and the gate
signal generator 12 uses this signal as a reference to
activate a recording gate signal and a modulator operation
start signal at timings (e)-1 and (f)-1, respectively, for
5 recording data. In response to the modulator operation
start signal, the laser driving circuit 8 is placed into
a recording state, and accordingly, the modulator operation
start signal is activated, whereby the modulation of data
is started, and the recording signal generation circuit 9
10 generates a recording signal.

Now, a method for determining the recording power
is described. As described above, in an apparatus for
recording data, the power used for recording is generally
15 set through learning.

Figure 13 is a flowchart showing an example of
learning of the recording power. Herein, an example of
learning in a DVD-RAM is described. In the optical disk
20 apparatus, two types of learning, i.e., learning for a
recording power P_{opt} and learning for an erasing power P_{eopt} ,
are performed for setting the recording power.

At the beginning of a learning process for the
25 recording power (S101-S103), an interim erasing power P_{el}
and an interim recording power P_{wl} are provided. The
recording power P_{wl} is set to a value sufficiently lower
than an optimum recording power, and the erasing power P_{el}
is set to a value in the vicinity of a value specified in
30 the specification. The apparatus performs recording in any
sector at the recording power P_{wl} which is sufficiently
lower than an optimum recording power and the erasing
power P_{el} which is in the vicinity of a value specified in

the specification, and measurement of the BER (S105).

5 Next, it is determined whether or not the measured
BER is smaller than a threshold C1 (S106). Since the
recording power Pw1 is a low power as described above, it
is determined that the measured value is greater than the
threshold C1 ("No" in S106). Next, the apparatus sets the
10 recording power to a value which is equal to the recording
power Pw1 plus a recording power increase Pws (S107), and
performs recording (S104), and measures the BER (S105). The
apparatus repeats this process and obtains a recording
power Pw when the BER becomes smaller than the threshold C1.
The product of the obtained recording power Pw and a
15 multiplying factor Cw is used as an optimum recording
power Pwopt (S108).

20 Next, the apparatus uses the optimum recording
power Pwopt determined as described above so as to obtain
an optimum erasing power Peopt. In the learning process for
the erasing power, the apparatus performs recording at the
erasing power Pel which is in the vicinity of a value
specified in the specification (S109), and measurement of
the BER (S110). Then, it is determined whether or not the
BER exceeds a threshold C2 (S111).

25 When the BER does not exceed the threshold C2, the
erasing power Pel is reduced by an erasing power
decrease Pes (S112), and the steps S109 and S110 are
repeated. During these steps, the erasing power Pe when the
30 BER exceeds the threshold C2 is obtained.

The obtained erasing power Pe is stored as an
erasing power variable Pel (S113). The erasing power Pe is

reset to the erasing power P_{e1} . Then, the recording is performed at the erasing power P_{e1} (S114). Next, the BER is measured (S115). Then, it is determined whether or not the BER exceeds the threshold C2 (S116). When the BER does not exceed the threshold C2, a predetermined value P_{es} is added to the erasing power P_e (S117). The erasing power P_e when the BER exceeds the threshold C2 is obtained. The central value of the erasing power P_e when the BER exceeds the threshold C2 and the previously obtained erasing power variable P_{eL} is assigned as an optimum erasing power P_{eopt} (S118).

The above process is merely an example of the learning for recording power. Alternatively, it is possible to learn the recording power by reproducing a recorded signal, detecting the amplitude thereof, and optimizing the value of the amplitude.

The above process is performed between the error correction/address detection device 13 and the power control means 11, whereby an optimum recording power is determined.

Figure 14 is a diagram for illustrating recording by the apparatus on a disk whose optimum recording power is 10 mW. The recording is performed while the laser power is controlled so that the output of the object lens is 10 mW. In Figure 14, in a portion on which a fingerprint is not attached, the transmissivity of a substrate layer is ideally 1, and accordingly, an effective recording power on a recording layer is 10 mW. As a result, optimum recording can be performed. However, as shown in the right side of Figure 14, when a fingerprint, dust, or the like is attached

on the substrate of the disk, the effective recording power on the recording layer is decreased according to the decrease in transmissivity due to the attachment. For example, when the transmissivity is decreased to 0.8, the recording power is decreased to 8 mW. As a result, optimum recording cannot be performed.

Next, reproduction of signal is described with reference to Figure 15. The description is made with a reproduction signal appropriately recorded in the recording layer. In a portion on which a fingerprint or dust is attached, the transmissivity is 0.8, and the light amount decreases when the light reciprocates down and up through this portion. Assuming that the signal amplitude in a normal (clean) portion is 1, data in the dirty portion is reproduced at the following amplitude:

$$(0.8)^2 = 0.64$$

Thus, in a portion on which a fingerprint, dust, or the like is attached, lack of the light amount and variation in the amplitude of the reproduction signal are caused. As a result, the attachment on the disk surface causes errors even when reproducing is performed on a portion in which appropriate recording has been performed.

The apparatus performs recording of data at the recording power determined by the above-described method. However, control for data recording is the control achieved by keeping the amount of laser light constant. Thus, in the apparatus having the above structure, when a fingerprint, a scratch, or the like is present on the substrate of the disk, or when the optical head 3 is subjected to vibration,

impact, or the like, introduced from outside, defocusing or off-tracking is caused, and accordingly, the effective recording power on a recording film is reduced, whereby recording may not be normally performed.

5

This malfunction is described with reference to Figure 16. Since the recording operation is performed as described above, the description thereof is omitted. In a sector in which recording is to be performed, when dirt, such as a fingerprint or the like, is present on the substrate as shown by the slanted lines in Figure 16, the effective recording power in that portion is reduced. At this time, when a wobble signal is observed, the signal amplitude thereof is decreased in a portion on which dirt, such as a fingerprint, is present. Typically, the recording power margin of a rewritable optical disk is 10% to 30%. If the light amount is decreased to be smaller than the reduced effective recording power, recording cannot be correctly performed on the disk. Observing the reproduction signal waveform after the recording, the amplitude of the reproduction signal after the recording is reduced in a portion on which dirt, such as a fingerprint, is present. As a result, it becomes difficult to correctly reproduce data.

25

In summary, in a conventional apparatus structure, in recording data onto a DVD-RAM, there is a problem that recording by the apparatus cannot be appropriately performed due to a defect or dirt on a substrate of a disk, such as a fingerprint, a scratch, etc, or due to defocusing caused by a vibration/impact outside the optical head.

30

09763277.051101

DISCLOSURE OF INVENTION

5 A power control device according to the present invention for controlling a power of a light source of an optical beam directed to an optical medium, includes: a reflected light detector for detecting reflected light from the optical medium when irradiated by an optical beam which is following a track; an arithmetic unit for calculating from the reflected light a transmissivity of light
10 transmitted from a disk surface to a recording layer or an amount of directed light on the recording layer of the medium; and power control means for controlling the power of the light source for emission based on a calculation result produced by the arithmetic unit, whereby the above
15 object is achieved.

The optical medium may have a recording track which has been wobble-processed in a disk radius direction; the reflected light detector may extract the wobble signal
20 component from a tracking error signal during recording; and the power control means may control laser power so as to keep an amplitude value of the wobble signal component substantially constant.

25 The reflected light detector may detect an amplitude of the wobble signal component from a tracking error signal obtained when the optical beam follows the track; the arithmetic unit may use the amplitude value of the wobble signal in a calculation; and the power control means may
30 control a single-value control power or a multiple-value control power based on the calculation result of the arithmetic unit.

The power control means may control a duration of a recording pulse during recording.

5 The arithmetic unit may calculate a reference value from the detected wobble signal amplitude, and may use the reference value and the wobble signal amplitude in a calculation process.

10 The arithmetic unit may calculate the reference value for each of the attributes of a track, presence/absence of data in the track, recording/reproduction states of an apparatus, and combinations thereof, and may selectively use the reference value according to conditions such as the attributes of a track followed by the optical beam,
15 presence/absence of data in the track, recording/reproduction states of the apparatus, and combinations thereof.

20 When controlling a power different from that determined when the reference value is obtained, the arithmetic unit may correct the reference value and the detected wobble signal amplitude according to the different power and performs a calculation process.

25 The power control means may determine whether control is performed, not performed, or stopped, or changes control modes according to a time period during which control works or an amount of a power to be controlled.

30 The power to be controlled may be used for reproducing data contained in the track.

The power to be controlled may be used for recording

or erasing data in the track.

09763327, 051101

An optical disk apparatus according to the present invention for recording or reproduction on an optical disk including a track in which a recording region is wobble-processed, comprising: optical means for reading information from the optical disk or recording information in the optical disk; control means for controlling the optical means; signal generation means for generating a tracking error signal indicating a scanning state of the optical means on the track of the optical disk; extraction means for extracting a wobble signal component from the tracking error signal; amplitude detection means for detecting an amplitude of the wobble signal component extracted by the extraction means; a bias generation circuit for generating a bias voltage based on an output of the amplitude detection means; an arithmetic unit for outputting a calculation result obtained from the bias voltage generated by the bias generation circuit and an output voltage of the amplitude detection means according to a predetermined calculation rule; and recording power control means for controlling recording power during recording data, wherein during recording, the recording power is controlled based on the calculation result obtained by the arithmetic unit, whereby the above object is achieved.

The optical disk apparatus may be capable of recording data in a guiding groove portion and an inter-guiding groove portion of the optical disk; the optical disk apparatus may further include identification means for identifying whether a track scanned by the optical means is in the guiding groove portion or the inter-guiding groove portion; and the bias generation circuit may generate

two types of bias voltages, a bias voltage for recording in the guiding groove portion and a bias voltage for recording in the inter-guiding groove portion, based on an output signal of the identification means.

5

The bias generation circuit may include a low-pass filter and may generate an average value of an output of the amplitude detection means or a bias voltage corresponding to a gradual change in amplitude on the order of a rotational component of a disk.

10

The calculation rule of the arithmetic unit may obtain a difference by subtracting the bias voltage generated by the bias generation circuit from the output voltage of the amplitude detection means; may assume the voltage generated by the bias generation circuit as being "1" and obtains a ratio of the difference to the voltage generated by the bias generation circuit; and according to the result, a current laser emission value is output as it is, or a value equivalent to the ratio of the difference is added to or subtracted from the current laser emission value which is assumed as being "1", and a value obtained by the addition/subtraction is output as a result.

15

20

25

The optical disk apparatus may further include optimum power detection means for detecting an optimum power during recording, wherein an amplitude of a wobble signal component may be detected while recording is performed at the optimum power determined by the optimum power detection means, and power control is performed based on the calculation result of the arithmetic unit.

30

In a learning process for the bias generation

09763277-051101

circuit, recording may be performed only with the optimum power determined by the optimum power detection means, and an average value of a wobble signal amplitude voltage during the recording may be used as an optimum bias voltage or an initial value of the bias voltage.

When a data error is detected in a data check operation immediately after data has been recorded, power control may be conducted based on the calculation result of the arithmetic unit so as to perform a recording operation again.

In the process of recording at an optimum power determined by the optimum power detection means and further recording with power control based on the calculation result of the arithmetic unit, when a set power for recording exceeds a predetermined range, the apparatus may provide a cautionary alarm about such being an abnormality of the optical disk or the apparatus.

In the process of recording with power control based on the calculation result of the arithmetic unit, when a set power for recording exceeds a predetermined range for a predetermined time period, the apparatus may provide a cautionary alarm about such being as an abnormality of the optical disk or the apparatus.

In the process of recording with power control based on the calculation result of the arithmetic unit, when a set power for recording exceeds a predetermined range for a predetermined time period, a portion in which the recording has been performed may be treated as being inappropriate for recording.

5 The calculation rule of the arithmetic unit may be a difference between the bias voltage generated by the bias generation circuit and the output voltage of the amplitude detection means.

10 The calculation rule of the arithmetic unit may assume that the bias voltage generated by the bias generation circuit is "1", may calculate a positive square root of the output voltage generated by the amplitude detection means, and may provide a difference between a value of the positive square root and "1" as a calculation result.

15 The calculation rule of the arithmetic unit may assume that the bias voltage generated by the bias generation circuit as being "1", may calculate a positive square root of the output voltage generated by the amplitude detection means, and may provide a reciprocal of the positive square root as a calculation result.

20 The arithmetic unit may generate a calculation result when a difference between the bias voltage generated by the bias generation circuit and the output voltage generated by the amplitude detection means exceeds a predetermined range; and the recording power control means may conduct power control based on the calculation result of the arithmetic unit.

30 The optical disk apparatus may further include optimum power detection means for detecting an optimum recording power during recording, wherein the recording power control means may detect an amplitude of a wobble signal component while recording is performed at an optimum

power determined by the optimum power detection means, and may conduct power control based on the calculation result of the arithmetic unit.

5 An optical disk apparatus according to the present invention for recording or reproduction on an optical disk including a track in which a recording region is wobble-processed includes: optical means for reading information from the optical disk or recording information
10 in the optical disk; control means for controlling the optical means; signal generation means for generating a tracking error signal obtained when the optical means follows the track of the optical disk; detection means for detecting attributes of the track followed by the optical
15 means which includes presence/absence of information; extraction means for extracting a wobble signal component from the tracking error signal; amplitude detection means for detecting an amplitude of the wobble signal component extracted by the extraction means; reference value
20 generation means for generating a reference value for each attribute of the track based on the attributes of the track which have been detected by the attribute detection means and an output of the amplitude detection means; an arithmetic unit for calculating a transmissivity of light transmitted
25 from a disk surface to a recording layer or an amount of directed light on the recording layer of the medium from the reference value generated by the reference value generation means and the output voltage of the amplitude detection means, and outputting required power of a light
30 source calculated based on a value of the transmissivity or a value of the amount of directed light as a calculation result; and power control means for controlling the power of the light source of an optical beam spot directed to the

optical disk, wherein the recording power control means controls the power of the light source in a manner recited in claims 5-10 based on the calculation result obtained by the arithmetic unit, whereby the above object is achieved.

5

A threshold may be provided for the calculation result obtained based on the detected wobble signal amplitude and the apparatus may detect that the calculation result exceeds the threshold or that the calculation result exceeds the threshold for a predetermined time period, whereby the apparatus may detect an abnormal state in the control means for controlling the optical means and changes its operation state.

10

The optical disk apparatus may read information from or records information in multiple types of disks; the optical disk apparatus may include detection means for detecting the type of disk; and the optical disk apparatus may conduct/may not conduct power control for the light source of the optical beam based on the calculation result, or may change an operation mode according to the type of disk detected by the detection means or a duration of recording/reproduction of data or a duration of power control.

15

20

25

According to one aspect of the present invention, when an apparatus records data on a disk a wobble signal included in a tracking signal is extracted to detect a signal amplitude thereof, whereby dirt on a disk substrate or a focusing state of the apparatus is detected. During recording, power control is conducted according to the amplitude information, whereby reliability of the apparatus during recording of data can be improved.

30

0976327 051101
FOI 50 229260

According to another aspect of the present invention, when an apparatus records data on a disk, an operation for checking recorded data is performed. Only when there is an error in the written data, power control is conducted based on amplitude information of a wobble signal component, and a rewriting operation is performed. Thus, the present invention is applied to the minimum of data that the apparatus failed to write and that need to be rewritten, whereby reliability of recorded data can be improved.

According to still another aspect of the present invention, when a recording operation is performed at a power exceeding a predetermined range, the apparatus provides a cautionary alarm, whereby a user of the apparatus is informed of an abnormality of the apparatus or disk.

According to still another aspect of the present invention, when a set power exceeds a predetermined range for a predetermined time period, a portion recorded at the power is treated as being inappropriate for recording, and a verifying operation is omitted, whereby a processing speed can be increased.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is a block diagram of an optical disk recording/reproducing device according to embodiment 1.

Figure 2 is a chart for describing an operation of the optical disk recording/reproducing device according to embodiment 1.

Figure 3 is a block diagram of an optical disk recording/reproducing device according to embodiment 2.

5 Figure 4 is a diagram for illustrating a recording principle according to embodiment 2.

Figure 5 is a block diagram of an example of an arithmetic unit according to embodiment 2.

10 Figure 6 is a block diagram of an example of another arithmetic unit according to embodiment 2.

15 Figure 7 is a graph showing a laser emission waveform in a case where the set power is a single value according to embodiment 2.

20 Figure 8 is a graph showing a laser emission waveform in a case where the set power is a multiple value according to embodiment 2.

Figure 9 is a graph showing a laser emission waveform in a case where the pulse width is controlled according to embodiment 2.

25 Figure 10 is a diagram for illustrating recording tracks of a DVD-RAM according to embodiment 2.

Figure 11 is a block diagram of a conventional optical disk recording/reproducing device.

30 Figure 12 is a chart for describing an operation of the conventional optical disk recording/reproducing device.

Figure 13 is a flowchart of a method for determining a suitable recording power of the optical disk recording/reproducing device.

5

Figure 14 is a diagram for illustrating a recording operation of the conventional optical disk recording/reproducing device.

10

Figure 15 is a diagram for illustrating a reproducing operation of the conventional optical disk recording/reproducing device.

15

Figure 16 is a chart for describing an operation of the conventional optical disk recording/reproducing device.

BEST MODE FOR CARRYING OUT THE INVENTION

20

(Embodiment 1)

Hereinafter, embodiments of the present invention will be described with reference to Figures 1 and 2.

25

Figure 1 shows a block diagram of an optical disk recording/reproduction apparatus of the present invention. In Figure 1, elements 1 to 15 have the same structures as the conventional structures, and accordingly, the description thereof is omitted.

30

Reference numeral 16 denotes an amplifier/filter for extracting a wobble signal component from a tracking error signal output from the reproduction signal/servo signal detection circuit 4; reference numeral 17 denotes

an envelope detection circuit for detecting the amplitude of a wobble signal which is an output signal of the amplifier/filter 16; reference numeral 18 denotes a bias generation circuit for using an output of the envelope
5 detection circuit to generate a target voltage; reference numeral 19 denotes an arithmetic unit for outputting an operation result obtained from voltages generated by the bias generation circuit 18 and the envelope detection circuit 17 according to a predetermined algorithm; and
10 reference numeral 20 denotes recording power setting means capable of setting a power in the laser driving circuit 8 based on the set power of a CPU 22 and an operation result of the arithmetic unit 19.

15 An optical disk recording/reproduction apparatus having such a structure according to the present embodiment will be described with reference to Figure 2.

20 A signal read out through the optical head 3 is output by the reproduction signal/servo signal detection circuit 4 as a reproduction signal shown in Figure 2(a) and a tracking error signal shown in Figure 2(b). The amplifier/filter 16 extracts only a wobble signal component from the tracking error signal. Figure 2(c) shows a wobble
25 signal. When recording is performed at constant power without the power control of the present invention, the signal amplitude of the extracted wobble signal decreases in a portion where dirt, such as a fingerprint, is present on the substrate as shown in Figure 2(c). Moreover, the
30 output voltage of the envelope detection circuit 17 decreases in a portion where dirt is present on the substrate as shown in Figure 2(d). The arithmetic unit 19 receives an envelope signal of the wobble (solid line of Figure 2(d))

and an output voltage of the bias generation circuit 18 (broken line of Figure 2(d)). As a result, the arithmetic unit 19 outputs a voltage as shown in Figure 2(e).

5 In the present embodiment, an operation in the arithmetic unit 19 is a simple difference detection. In an actual operation, the difference between an output voltage of the bias generation circuit 18 and an output voltage of the envelope detection circuit 17 is calculated, and what
10 percentage of the output voltage of the bias generation circuit 18, which is assumed as being "1", is equal to the difference is calculated and output as a calculation result.

 As the output voltage of the bias generation
15 circuit 18, a peak value of the wobble envelope signal, a direct voltage which has been obtained by processing the wobble envelope signal with a filter having a large time constant and which varies according to the rotation of the disk, or the like, can be used.

20 In the present embodiment, the recording power is controlled by adding the output of the arithmetic unit 19 to the recording power. After the recording power has been controlled, in a portion where the signal amplitude is
25 decreased due to dirt on the substrate, recording is performed at an increased recording power as shown in Figure 2(f). Since it is a matter of course that, in an address portion, the emission power of a laser is forcibly reduced to a reproduction level, the output of the arithmetic
30 unit 19 exhibits a large voltage value; however, the power of the laser is at a reproduction level. Figure 2(g) shows a wobble envelope signal which is actually detected at the controlled power. During recording of data, the recording

power is controlled so that this level is substantially equal to the output of the bias generator.

Furthermore, a reproduction signal of data recorded under the above control is shown in Figure 2(h).

The present embodiment has been described with a calculation in the arithmetic unit 19 being a simple difference detection. However, it is possible to construct an arithmetic unit such that in the case where the amplitude variation of the wobble signal is large even during a normal recording operation, the calculation result is output only when the difference between the inputs of the arithmetic unit 19 exceeds a threshold, and when the difference is below the threshold, the "100% (no control)" value is output.

Furthermore, the operation in the arithmetic unit 19 is not limited to a simple difference detection. There is another possible operation in which the output of the bias generation circuit 18 is assumed as being "1", the square root of an output value of the envelope detection circuit 17 is obtained, a subtraction of this square root from "1" is added to "100%", and the result of this addition is used as an output.

As described above, the present invention provides an apparatus in which the amplitude of a wobble signal is detected during a recording operation at a set optimum recording power, the signal is compared with a level recognized as being optimum, and a recording power is controlled using the difference as an increase of the recording power, whereby highly reliable recording can be performed even when dirt is attached on the substrate of

the disk.

Furthermore, in the present invention, if a combination of a disk and an apparatus is previously limited, the amplitude voltage of the wobble signal can be recognized as constant among various apparatuses. The amplitude voltage can be used as a target value to constantly control the optimum recording power.

In the above embodiment, the description has been focused on dirt on a substrate of the disk, such as a fingerprint or the like. However, it is known that the amplitude of the wobble signal can be decreased due to defocusing or off-tracking of an optical disk or due to tilting caused when mounting an optical head or tilting caused by a curvature of the disk. Thus, with the wobble signal, malfunction of the apparatus can be detected as well as dirt on the substrate of the disk, etc.

Furthermore, the CPU 22 may read from the power control means 20 power added by the power control based on the amplitude of the wobble signal. In this way, it is possible to inform a user of a malfunction of an optical disk or an apparatus when the value of the power exceeds a threshold.

(Embodiment 2)

Embodiment 2 of the present invention is shown in Figure 3.

In Figure 3, reference numeral 101 denotes a motor; reference numeral 102 denotes an optical disk; reference numeral 103 denotes an optical head for converting reflected

light from the disk into an electric signal and outputting the signal to a reproduction signal/servo signal detection circuit 104; reference numeral 104 denotes the reproduction signal/servo signal detection circuit for generating a reproduction signal, a focus error signal, a tracking error signal 1, and a tracking error signal 2 from an output signal obtained from the optical head 103; reference numeral 105 denotes focus/tracking control means for controlling the optical head 103 by using a servo signal from the reproduction signal/servo signal detection circuit 104, for controlling the motor 101, and for notifying a reference value generator 117 about the polarity of a track presently being scanned; reference numeral 106 denotes a reproduction signal detecting/binarizing circuit for detecting the presence/absence of data and notifying the reference value generator 117 of such and for binarizing the reproduction signal; reference numeral 107 denotes a demodulator for demodulating the binarized reproduction signal so as to generate reproduction data; reference numeral 108 denotes a laser driving circuit for driving a laser which is a light source of the optical head 103; reference numeral 109 denotes a recording signal generation circuit for generating a signal for modulating laser light by the laser driving circuit based on the data obtained after modulation; reference numeral 110 denotes a modulator for modulating data to be recorded so as to generate a signal which is supplied to the recording signal generation circuit; reference numeral 111 denotes power control means for controlling the laser power during recording/reproduction of data; reference numeral 112 denotes a gate signal generator for generating various gate signals based on a clock of a reference clock generator 114; reference numeral 113 denotes an error correction/address

0976327, 054404

0976327, 05440
T.07450, 2229260

detection device for detecting and correcting an error amount of the reproduction data demodulated by the demodulator 107 and for detecting an address in the reproduction data sequence; reference numeral 114 denotes the reference clock generator for generating a reference clock for recording/reproduction of data; reference numeral 115 denotes a CPU which provides the error correction/address detection circuit with a command to measure a BER, which can set the mode for the power setting or the laser power control in an arithmetic unit, and which manages a user interface; reference numeral 116 denotes an amplifier/bandpass filter/amplitude detection circuit for amplifying the tracking error signal 2 generated by the reproduction signal/servo signal detection circuit 104, for extracting a wobble signal, and for detecting the amplitude; reference numeral 117 denotes the reference value generator for generating a reference value for each of the attributes of a track which are determined based on the polarity of the track, the presence/absence of data, and the recording/reproduction state of the apparatus according to the detected value of a wobble signal amplitude from the disk which has been output from the amplifier/bandpass filter/amplitude detection circuit 116; reference numeral 118 denotes an arithmetic unit for performing calculation of output values of the amplifier/bandpass filter/amplitude detection circuit 116 and the set power from the CPU 115 to output a control signal to the power control means; and reference numeral 119 denotes disk distinction means.

30

An output signal read out from the optical disk 102 by the optical head 103 is supplied by the reproduction signal/servo signal detection circuit 104 to a subsequent

processing circuit as a reproduction signal, a focus error signal, a tracking error signal 1, and a tracking error signal 2. The focus error signal and the tracking error signal 1 are supplied to the focus/tracking control means 105, and the focus/tracking control means 105 controls the optical head 103 so as to follow the wavering of the disk surface and decentration of the disk. At the same time, in a DVD-RAM disk in which a recording region includes a guiding groove portion and an inter-guiding groove portion, tracking of the optical head 103 is controlled so as to be in one of the guiding groove portion and the inter-guiding groove portion. A signal indicating the guiding groove portion or the inter-guiding groove portion is supplied to the reference value generator 117 as one of the attributes of the track. The reproduction signal is supplied to the reproduction signal detecting/binarizing circuit 106, and a binarized data sequence and a read clock synchronized with the data are output to the demodulator 107. At the same time, in the same circuit, the presence/absence of a signal is detected and supplied to the reference value generator 117 as one of the attributes of a track being reproduced.

The reference clock generator 114 generates a reference clock which is necessary to modulate/demodulate data to be recorded/reproduced in this apparatus. The demodulator 107 performs conversion using the supplied binarized data sequence and the read clock according to a demodulation rule, and outputs the converted data to the error correction/address detection device 113 using the reference clock. The output reproduction data is supplied to the subsequent error correction/address detection device 113, and the subsequent error correction/address

5 detection device 113 detects an address position on the track. An address signal detection signal is supplied to the gate signal generator 112, and the gate signal generator 112 uses this signal as a position reference on the track so as to generate a gate signal which is necessary in recording/reproduction using the reference clock.

10 In order to record data, data to be recorded is converted into a data sequence to be recorded by the modulator 110 according to a modulation rule. The data sequence obtained by the conversion is further converted by the recording signal generation circuit 109 into a signal for modulating laser light, and the signal is supplied to the laser driving circuit 108. The laser driving
15 circuit 108 modulates the laser light which is a light source of the optical head 103 for recording data on the disk. The recording is performed at a recording power determined by the arithmetic unit 118. The reference value generator 117 receives a polarity signal of the above track, a data presence/absence detection signal, and a recording gate
20 indicating a recording/reproduction state of the apparatus. The reference value generator 117 generates respective reference values from a wobble signal amplitude which is input for each of the combinations of the above three signals, and supplies the respective reference values to the
25 arithmetic unit 118. The arithmetic unit 118 calculates the transmissivity of the disk, and generates a control signal for adjusting a recording power on a recording layer of the disk to be the recording power set by the CPU 115.
30 In the calculation of the arithmetic unit 118, a wobble signal amplitude from the disk which is output from the amplifier/bandpass filter/amplitude detection circuit 116 and a value from the reference generator 117 are used.

Details of the power control principle are described with reference Figures 4 and 14. As shown in Figure 14, recording power control in a conventional apparatus is to control the emission power of the laser. Therefore, in a portion where an attachment, such as a fingerprint or dust, is present on the disk surface, an effective recording power is insufficient. As a result, an appropriate recording cannot be performed.

According to embodiment 2, when recording is performed on the disk with a fingerprint or dust attached thereon, a wobble signal amplitude is detected from the disk during recording, and the transmissivity of a fingerprint or dust attached on the disk surface is calculated, whereby the irradiation amount of the laser actually illuminating the recording layer is controlled.

Details are described with reference to Figure 4. First, a portion with no fingerprint attached is considered. The light amount of the laser effectively directed to the recording layer, P_{wr} (mW), is

$$P_{wr} = P_w \times T \dots\dots(1)$$

where P_w (mW) denotes the laser recording power at the output of an object lens, T denotes the transmissivity of the disk substrate ($=1$), T_f denotes the transmissivity of an attachment on the disk surface, and K_{rw} denotes the wobble modulation factor including reflectance.

Thus, a laser emission amount required for recording is:

$$P_w = P_{wrs}/T \dots\dots(1)'$$

where P_{wrs} denotes an optimum effective recording power on the recording layer. Moreover, a wobble signal detected at this time, W_{rw} , is obtained by multiplying the effective power P_w by the wobble modulation factor including reflectance, K_{rw} , and further multiplying by the transmissivity of the substrate:

$$W_{rw} = P_w \times T \times K_{rw} \times T = P_w \times K_{rw} \times T^2 \dots\dots(2)$$

Above expression (2) can be modified into expression (3):

$$T = (W_{rw}/(P_w \times K_{rw}))^{0.5} \dots\dots(3)$$

where K_{rw} is a constant value determined for each disk which is obtained by experiment, and P_w is a known value for an output power. Based on expression (3), the transmissivity of the disk substrate is obtained. Accordingly, P_w is obtained by expression (1)' in order to control the required effective power P_{wr} to be constantly set to the optimum effective recording power P_{wrs} .

Next, control which uses a reference value is described. A wobble signal amplitude W_{rws} obtained when recording is performed in a portion with no attachment at an optimum recording power P_{ws} is used as a reference value.

The wobble signal amplitude W_{rws} is represented by expression (2):

$$W_{rw} = P_w \times K_{rw} \times T^2$$

Ideally, $T=1$. In this case,

$$Wrws = Pws \times Krw \dots (2)'$$

5 Next, in a portion with a fingerprint attached thereon, a wobble signal Wrw' is represented as:

$$Wrw' = Pws \times Tf \times Krw \times Tf = Pws \times Krw \times Tf^2 \dots (4)$$

10 In the case where Tf is 0.8, combining expression (2)' into expression (4), a detected wobble signal amplitude is represented as:

$$Wrw' = Wrws \times Tf^2 = 0.64 \times Wrws \dots (5)$$

15 Expression (5) is modified into:

$$Tf = (Wrw' / Wrws)^{0.5} = 0.64^{0.5} = 0.8 \dots (6)$$

20 Thus, when $Pwrs = 10$ mW, the required power Pw is:

$$Pw = Pwrs / Tf = 10 / 0.8 = Pwrs \times 1.25 = 12.5 \text{ mW}.$$

25 When the control is performed during a recording operation in an actual apparatus, the detected wobble amplitude Wrw' is varied by the power, which is controlled as described above. Therefore, when control formed by a control loop is repeatedly performed, the amplitude of the detected wobble signal or the reference value should be
30 corrected during calculation according to a scaling factor of the power used for determining the reference value for the controlled power.

For example, assuming that an apparatus in which the recording power is controlled stepwise is used in the above example, and T_f is first detected as being 0.8, the recording power P_w is the optimum recording power P_{ws} multiplied by $1/T_f$, i.e., 1.25. In the case where the control is performed without correction, a subsequently detected wobble signal amplitude is 1.25 times greater than the previous signal, and the ratio of the detected wobble signal amplitude to the reference wobble signal amplitude value is 0.64×1.25 , i.e., 0.8. Then, the recording power is corrected with the square root of 0.8, such that the recording power becomes 1.12 times greater than the optimum recording power P_{ws} . In this way, the recording power gradually changes without changing the transmissivity of a fingerprint T_f .

Furthermore, correction is necessary when the recording power P_w is different from the recording power P_{ws} used for obtaining the above reference value W_{rws} . Now, assume that the optimum recording power is different between an outer track and an inner track, and the reference value of the wobble signal amplitude is determined on the inner track. If the set recording power is greater in the outer track than in the inner track, the detected wobble signal amplitude is recognized as being small, and as a result, excessive power is provided.

Now, a specific description is made. Assume that the recording sensitivity is different between an outer track and an inner track of the disk because of any reason, and an actual recording power P_w is different from an optimum recording power P_{ws} on a track in which a reference value W_{rws} has been obtained. Herein, the reference value W_{rws} is obtained using an optimum recording power P_{ws}

on the inner track.

The apparatus performs a retrieving operation, and performs control in the outer track. Assuming that the scaling factor of an optimum recording power in this track is C_p ($C_p < 1$), and other parameters such as K_{rw} , etc., are the same, the reference value of the wobble signal amplitude in this outer track, $Wrws2$, is represented as:

$$Wrws2 = Pws \times C_p \times T \times K_{rw} \times T = Pws \times K_{rw} \times C_p = Wrws \times C_p \dots (7)$$

However, when correction is not made, the detected wobble signal amplitude is C_p times greater than the reference wobble signal amplitude, and accordingly, the power correction is performed by a factor of $1/(\text{the square root of } C_p)$. As a result, recording cannot be performed at optimum power. In other words, in the case where optimum recording power on a track in which recording is performed is different from an optimum power on a track in which the reference value is determined, a value obtained by multiplying the reference value by a scaling factor of a control power used for actual recording with respect to the power used for obtaining the reference value can be used in another track as a reference value.

Correction for a case where the above set recording power is different and correction for a case where the recording power is changed by control are described with reference to Figure 5. Figure 5 shows an example of an arithmetic unit for controlling the recording power while performing the above correction.

In Figure 5, the reference value obtained using a recording power P_{ws} is input and multiplied by a correction factor C_p (P_w/P_{ws}) for the above recording power P_w to be controlled. A value obtained by this multiplication is used as an optimum reference value for modifying the optimum recording power.

On the other hand, in order to correct a detected value with a set power P_w , a detected wobble signal amplitude is multiplied by a detected value of a wobble amplitude ($P_w \times 1/T_{f_{n-1}} \times T_f^2 \times K_{rw}$) which corresponds to the current laser power ($P_w \times 1/T_{f_{n-1}}$) determined based on the transmissivity of the previous attachment ($T_{f_{n-1}}$), whereby a wobble amplitude corresponding to the recording power P_w is obtained.

The wobble amplitude obtained based on the recording power P_w is:

$$P_w \times T_f^2 \times K_{rw} = C_p \times P_{ws} \times T_f^2 \times K_{rw}.$$

This value is normalized by a corrected reference value $C_p \times W_{rws} (= C_p \times P_{ws} \times K_{rw})$.

The normalization is performed by dividing the product of the detected wobble amplitude and the corrected value of the recording power by a correct reference value obtained after the optimum recording power has been modified.

$$C_p \times P_{ws} \times T_f^2 \times K_{rw} / C_p \times P_{ws} \times K_{rw} = T_f^2$$

The recording power P_w is multiplied by a factor of $1/(\text{the positive square root of the normalized wobble amplitude})$

($=1/T_f$), and the value obtained by the multiplication is output. In the process of modifying the set recording power by the above calculations, the transmissivity of the disk is constantly obtained based on the wobble amplitude, whereby the optimum recording power can be successively controlled.

Furthermore, there is an alternate possible method which can be performed in place of the above-described correction. A portion on which a recording operation is to be performed is first reproduced at a constant power, and a wobble signal obtained at this time is stored. Then, when the recording operation is actually performed, a target value for a recording power is calculated from the stored wobble amplitude.

As in the above description, the calculation is performed solely with a detected wobble amplitude, otherwise, a reference value is determined from the detected wobble signal, and a calculation of the reference value and a wobble amplitude when a fingerprint or dust is present on a disk surface is performed, whereby power can be controlled. However, in an actual apparatus, the reference value may be varied according to differences in attributes of a track, e.g., differences between a guiding groove portion and an inter-guiding groove portion, a difference in reflectance among disks, a difference in reflectance due to the presence/absence of recorded data in a track, etc. For example, it is sometimes necessary to change the reference value by determining a reference signal according to information in guiding groove/inter-guiding groove portions of a track which is being scanned by control means, a data record presence/absence signal in a reproduction

signal processing circuit, or attributes of each track which are determined according to the recording/reproduction state of the apparatus. As possible means for changing the reference value, there is a method in which an A/D converter is used for obtaining a reference value, digital outputs of the converter for the respective attributes are averaged, and this averaged value is adjusted for each of the combinations of the attributes.

In the above example, control has been described with an example of recording power control. However, it is needless to say that the above control can be applied to power control during reproduction.

Next, an example of power control during reproduction is described. A problem which occurs in a conventional apparatus during reproduction is that when reproduction is performed at a constant laser power, the transmissivity of light on a disk surface is partially varied due to a fingerprint, dust, or the like, attached thereon, and accordingly, variation in a DC component or an amplitude of a reproduction signal is caused. Now, a method for controlling the power by stabilizing the amplitude of the reproduction signal is described.

In a portion with no attachment, the reproduction signal amplitude V_{rfs} is represented as:

$$V_{rfs} = P_{ps} \times K_{rf} \times T^2$$

where P_{ps} denotes an optimum laser power for reproduction in the portion with no attachment, T denotes the transmissivity of a disk substrate in the portion with no

attachment, T_f denotes the transmissivity of the attachment, and K_{rf} denotes a modulation factor.

Ideally, $T=1$. Thus,

5

$$V_{rfs} = P_{ps} \times K_{rf} \dots\dots(8)$$

In a portion with an attachment, the reproduction signal amplitude V_{rf}' is represented as:

10

$$V_{rf}' = P_{ps} \times K_{rf} \times T_f^2 \dots\dots(9)$$

The reproduction power P_p is controlled for keeping a reproduction signal constant. From expressions (8) and (9),

15

$$P_p = P_{ps} \times V_{rfs} / V_{rf}' = P_{ps} \times K_{rf} / (K_{rf} \times T_f^2) = P_{ps} \times 1 / T_f^2$$

Thus, when light emission is performed at a power obtained by multiplying an optimum power by a factor of $1/T_f^2$, the amplitude can be kept constant.

20

On the other hand, from expression (4), the wobble signal amplitude W_{rps} in a portion with no attachment can be expressed as:

25

$$W_{rps} = P_{ps} \times K_{rw} \times T^2$$

where K_{rw} is a modulation factor for a recording layer including a reflectance. Since ideally, $T=1$:

30

$$W_{rps} = P_{ps} \times K_{rw} \dots\dots(10)$$

0976327 051101

In a portion with an attachment, a wobble signal amplitude Wrp' detected on a disk can be expressed similarly to expression (4):

5 $Wrp' = Pps \times Tf \times Krw \times Tf = Pps \times Krw \times Tf^2 \dots\dots(11)$

From expressions (10) and (11),

10 $Wrps/Wrp' = 1/Tf^2 \dots\dots(12)$

With the obtained value $1/Tf^2$, the power can be controlled.

15 The wobble signal amplitude $Wrps$ is output as a reference value for reproduction from the reference value generator 117 to the arithmetic unit 118. During reproduction, the arithmetic unit 118 performs the above calculations to control the power control during reproduction, whereby a reproduction amplitude can be kept
20 constant. In view of the above expressions, it is possible to use a reproduction signal amplitude for power control. However, a wobble signal amplitude is preferable because when the power control is performed based on the reproduction signal, if an unrecorded sector is present among the recorded
25 sectors, a problem where the control cannot be performed, or the like, may be caused.

30 As long as polarized light, which is a signal caused by a meandering of a track, can normally follow the track, a sufficient amplitude of a wobble signal can be obtained. Thus, it is relatively easy to establish a control system.

An example of a calculation block for performing the

above power control calculations for reproduction is shown in Figure 6. In this structure (details thereof are omitted), when a wobble signal amplitude is smaller than a reference value, a subsequent recording power is calculated while correcting a current emission power. Control for keeping the amplitude of a reproduction signal constant can be achieved based on the above calculations. However, such a control for keeping the amplitude of a reproduction signal constant may produce an excessive emission power on a recording face of a disk. In order to avoid such a problem, it is preferable to perform calculations shown in Figure 5 even during reproduction so as to keep an effective power on a recording layer constant.

In the apparatus, it is easy to change operation modes between power control for recording and power control for reproduction according to a command received by the CPU 115. Furthermore, it is needless to say that the operation mode can be changed according to the state of the apparatus, a type of a disk with which the apparatus is performing recording/reproduction, the length or time of data to be recorded/reproduced by the apparatus in response to the received command, and the amount of power to be controlled, whereby the reliability of the apparatus can be improved.

Furthermore, in general, when recording/reproduction is performed on a track with a fingerprint or dust attached thereon, a pseudo focus error signal or a pseudo tracking error signal caused by such an attachment may make a control operation of optical means or control means thereof unstable. There is a possible way to prevent such a problem, in which: the transmissivity

obtained by calculation based on a detected wobble is monitored; when the value of this transmissivity exceeds a predetermined value, or when the value of this transmissivity exceeds a predetermined value for a predetermined time period, an attachment is detected on a disk surface; and the operation state of the control means is changed, e.g., an operation range of the control means is narrowed, the control state is held, etc. With such a structure, the control performance of the apparatus can be improved.

Figure 7 is a graph showing a laser emission waveform in the case where the set power is a single value. Figure 8 is a graph showing a laser emission waveform in the case where the set power assumes multiple values. As shown in Figures 7 and 8, the power control means 111 controls a single-value or multiple-value control power based on a calculation result of the arithmetic unit 118.

Figure 9 is a graph showing a laser emission waveform in the case where the pulse width is controlled. The power control means 111 controls the duration of a recording pulse during recording as shown in Figure 9.

Figure 10 is a diagram for illustrating recording tracks of a DVD-RAM. As shown in Figure 10, the optical disk has a guiding groove track and an inter-guiding groove track. An optical disk apparatus can record data in both the guiding groove track and the inter-guiding groove track. The optical disk apparatus includes identification means for identifying whether a track scanned by optical means is a guiding groove track or an inter-guiding groove track. A bias generation circuit generates a bias voltage for

recording in a guiding groove track and a bias voltage for recording in an inter-guiding groove track.

INDUSTRIAL APPLICABILITY

5

As described above, the present invention provides the following effects:

10 1. A wobble signal amplitude detected during recording of data is compared with a wobble signal amplitude detected during normal recording at an optimum power, the difference therebetween is used for controlling recording power, whereby optimum recording can be performed even when dirt, such as a fingerprint, is present on a disk surface.
15 Furthermore, an effective, optimum recording is possible even when decrease in effective recording power is caused by defocusing, off-tracking, or tilting due to external factors outside the apparatus.

20 2. In the present invention, when a combination of a disk and an apparatus is previously limited, the amplitude voltage of a wobble signal is controlled to be a target voltage, whereby an optimum recording power can be constantly controlled.

25

3. Furthermore, in the apparatus of the present invention, it is possible to provide a system which informs about an occurrence of a malfunction. In such a system, during power control based on a wobble signal, when power
30 exceeding a predetermined percentage of an optimum recording power is added to the optimum recording power, a cautionary alarm is provided to a user.

In summary, according to the present invention, even with a disk having a fingerprint, dust, etc., on a face thereof, a desired power for recording/reproduction is calculated from an amount of reflected light, whereby the power can be controlled. Therefore, influence of a fingerprint or dust on performance of the apparatus for recording/reproducing data can be minimized. Moreover, a calculation result exceeding a predetermined threshold is detected, and an abnormality on a disk surface is then detected, whereby operation of optical means and control means thereof can be kept stable.

P. 43 of 60

Amendments of the claims under Article 19(1)(Rule 46)

CLAIMS

1. A power control device for controlling a power of a light source of an optical beam directed to an optical medium having a recording track which has been wobble-processed, comprising:

a reflected light detector for extracting a wobble signal component from a tracking error signal obtained from the optical medium when irradiated by an optical beam which is following a track;

an arithmetic unit for calculating, from an amplitude value of the wobble signal component, a transmissivity of light transmitted from a disk surface to a recording layer or an amount of directed light on the recording layer of the medium; and

power control means for controlling the power of the light source for emission based on a calculation result produced by the arithmetic unit.

2. (Canceled)

3. A power control device according to claim 1, wherein the power control means controls a single-value control power or a multiple-value control power based on the calculation result of the arithmetic unit.

4. A power control device according to claim 1, wherein the power control means controls a duration of a recording pulse during recording.

09/763277

5. A power control device according to claim 1, wherein the arithmetic unit calculates a reference value from the detected wobble signal amplitude, and uses the reference value and the wobble signal amplitude in a calculation process.

6. A power control device according to claim 5, wherein the arithmetic unit calculates the reference value for each of the attributes of a track, presence/absence of data in the track, recording/reproduction states of an apparatus, and combinations thereof, and selectively uses the reference value according to conditions such as the attributes of a track followed by the optical beam, presence/absence of data in the track, recording/reproduction states of the apparatus, and combinations thereof.

7. A power control device according to claim 5, wherein when controlling a power different from that determined when the reference value is obtained, the arithmetic unit corrects the reference value and the detected wobble signal amplitude according to the different power and performs a calculation process.

8. A power control device according to claim 5, wherein the power control means determines whether control is performed, not performed, or stopped, or changes control modes according to a time period during which control works or an amount of a power to be controlled.

9. A power control device according to claim 8, wherein the power to be controlled is used for reproducing data contained in the track.

0976327 051101

10. A power control device according to claim 8, wherein the power to be controlled is used for recording or erasing data in the track.

11. An optical disk apparatus for recording or reproduction on an optical disk including a track in which a recording region is wobble-processed, comprising:

optical means for reading information from the optical disk or recording information in the optical disk;

control means for controlling the optical means;

signal generation means for generating a tracking error signal indicating a scanning state of the optical means on the track of the optical disk;

extraction means for extracting a wobble signal component from the tracking error signal;

amplitude detection means for detecting an amplitude of the wobble signal component extracted by the extraction means;

a bias generation circuit for generating a bias voltage based on an output of the amplitude detection means;

an arithmetic unit for outputting a calculation result obtained from the bias voltage generated by the bias generation circuit and an output voltage of the amplitude detection means according to a predetermined calculation rule; and

recording power control means for controlling recording power during recording data,

wherein during recording, the recording power is controlled based on the calculation result obtained by the arithmetic unit.

12. An optical disk apparatus according to claim 11, wherein:

09763277.051101

the optical disk apparatus is capable of recording data in a guiding groove portion and an inter-guiding groove portion of the optical disk;

the optical disk apparatus further comprises identification means for identifying whether a track scanned by the optical means is in the guiding groove portion or the inter-guiding groove portion; and

the bias generation circuit generates two types of bias voltages, the bias voltage for recording in the guiding groove portion and a bias voltage for recording in the inter-guiding groove portion, based on an output signal of the identification means.

13. An optical disk apparatus according to claim 11, wherein the bias generation circuit includes a low-pass filter and generates an average value of an output of the amplitude detection means or a bias voltage corresponding to a gradual change in amplitude on the order of a rotational component of a disk.

14. An optical disk apparatus according to claim 11, wherein the calculation rule of the arithmetic unit obtains a difference by subtracting the bias voltage generated by the bias generation circuit from the output voltage of the amplitude detection means; assumes the voltage generated by the bias generation circuit as being "1" and obtains a ratio of the difference to the voltage generated by the bias generation circuit; and according to the result, a current laser emission value is output as it is, or a value equivalent to the ratio of the difference is added to or subtracted from the current laser emission value which is assumed as being "1", and a value obtained by the addition/subtraction is output as a result.

09763277 051101

15. An optical disk apparatus according to claim 11, further comprising optimum power detection means for detecting an optimum power during recording, wherein an amplitude of a wobble signal component is detected while recording is performed at the optimum power determined by the optimum power detection means, and power control is performed based on the calculation result of the arithmetic unit.

16. An optical disk apparatus according to claim 15, wherein in a learning process for the bias generation circuit, recording is performed only with the optimum power determined by the optimum power detection means, and an average value of a wobble signal amplitude voltage during the recording is used as an optimum bias voltage or an initial value of the bias voltage.

17. An optical disk apparatus according to claim 15, wherein when a data error is detected in a data check operation immediately after data has been recorded, power control is conducted based on the calculation result of the arithmetic unit so as to perform a recording operation again.

18. An optical disk apparatus according to claim 15, wherein, in the process of recording at an optimum power determined by the optimum power detection means and further recording with power control based on the calculation result of the arithmetic unit, when a set power for recording exceeds a predetermined range, the apparatus provides a cautionary alarm about such being an abnormality of the optical disk or the apparatus.

09763277 "051101"

19. An optical disk apparatus according to claim 11, wherein in the process of recording with power control based on the calculation result of the arithmetic unit, when a set power for recording exceeds a predetermined range for a predetermined time period, the apparatus provides a cautionary alarm about such being as an abnormality of the optical disk or the apparatus.

20. An optical disk apparatus according to claim 11, wherein in the process of recording with power control based on the calculation result of the arithmetic unit, when a set power for recording exceeds a predetermined range for a predetermined time period, a portion in which the recording has been performed is treated as being inappropriate for recording.

21. An optical disk apparatus according to claim 11, wherein the calculation rule of the arithmetic unit assumes the bias voltage generated by the bias generation circuit as being "1", and provides a value obtained by adding "1" to a difference between "1" and the output voltage of the amplitude detection means as a calculation result.

22. An optical disk apparatus according to claim 11, wherein the calculation rule of the arithmetic unit assumes that the bias voltage generated by the bias generation circuit is "1", calculates a positive square root of the output voltage generated by the amplitude detection means, and provides a value obtained by adding "1" to a difference between a value of the positive square root and "1" as a calculation result.

09763277-051101

23. An optical disk apparatus according to claim 11, wherein the calculation rule of the arithmetic unit assumes that the bias voltage generated by the bias generation circuit as being "1", calculates a positive square root of the output voltage generated by the amplitude detection means, and provides a reciprocal of the positive square root as a calculation result.

24. An optical disk apparatus according to claim 11, wherein:

the arithmetic unit outputs a calculation result when a difference between the bias voltage generated by the bias generation circuit which is an input to the arithmetic unit and the output voltage generated by the amplitude detection means exceeds a predetermined range; and

the recording power control means conducts power control based on the calculation result of the arithmetic unit.

25. (Canceled)

26. An optical disk apparatus for recording or reproduction on an optical disk including a track in which a recording region is wobble-processed, comprising:

optical means for reading information from the optical disk or recording information in the optical disk;

control means for controlling the optical means;

signal generation means for generating a tracking error signal obtained when the optical means follows the track of the optical disk;

detection means for detecting attributes of the track followed by the optical means which includes presence/absence of information;

0976327 05104
101150 2259250

extraction means for extracting a wobble signal component from the tracking error signal;

amplitude detection means for detecting an amplitude of the wobble signal component extracted by the extraction means;

reference value generation means for generating a reference value for each attribute of the track based on the attributes of the track which have been detected by the attribute detection means and an output of the amplitude detection means;

an arithmetic unit for calculating a transmissivity of light transmitted from a disk surface to a recording layer or an amount of directed light on the recording layer of the medium from the reference value generated by the reference value generation means and the output voltage of the amplitude detection means, and outputting required power of a light source calculated based on a value of the transmissivity or a value of the amount of directed light as a calculation result; and

power control means for controlling the power of the light source of an optical beam spot directed to the optical disk,

wherein the recording power control means controls the power of the light source in a manner recited in claims 5-10 based on the calculation result obtained by the arithmetic unit.

27. (Canceled)

28. An optical disk apparatus according to claim 26, wherein:

the optical disk apparatus reads information from or records information in multiple types of disks;

0976327, 05101
101150, 2259260

the optical disk apparatus includes detection means for detecting the type of disk; and


the optical disk apparatus conducts/does not conduct power control for the light source of the optical beam based on the calculation result, or changes an operation mode according to the type of disk detected by the detection means or a duration of recording/reproduction of data or a duration of power control.

0976327,054404
T.O.T.S.O. 2/22/92

ABSTRACT

5 A power control device for controlling a power of
a light source of an optical beam directed to an optical
medium. The power control device includes a reflected light
detector for detecting reflected light from the optical
medium when irradiated by an optical beam which is following
a track; an arithmetic unit for calculating from the
reflected light a transmissivity of light transmitted from
10 a disk surface to a recording layer or an amount of directed
light on the recording layer of the medium; and power control
means for controlling the power of the light source for
emission based on a calculation result produced by the
arithmetic unit.

0976327 054104
10150 2229260

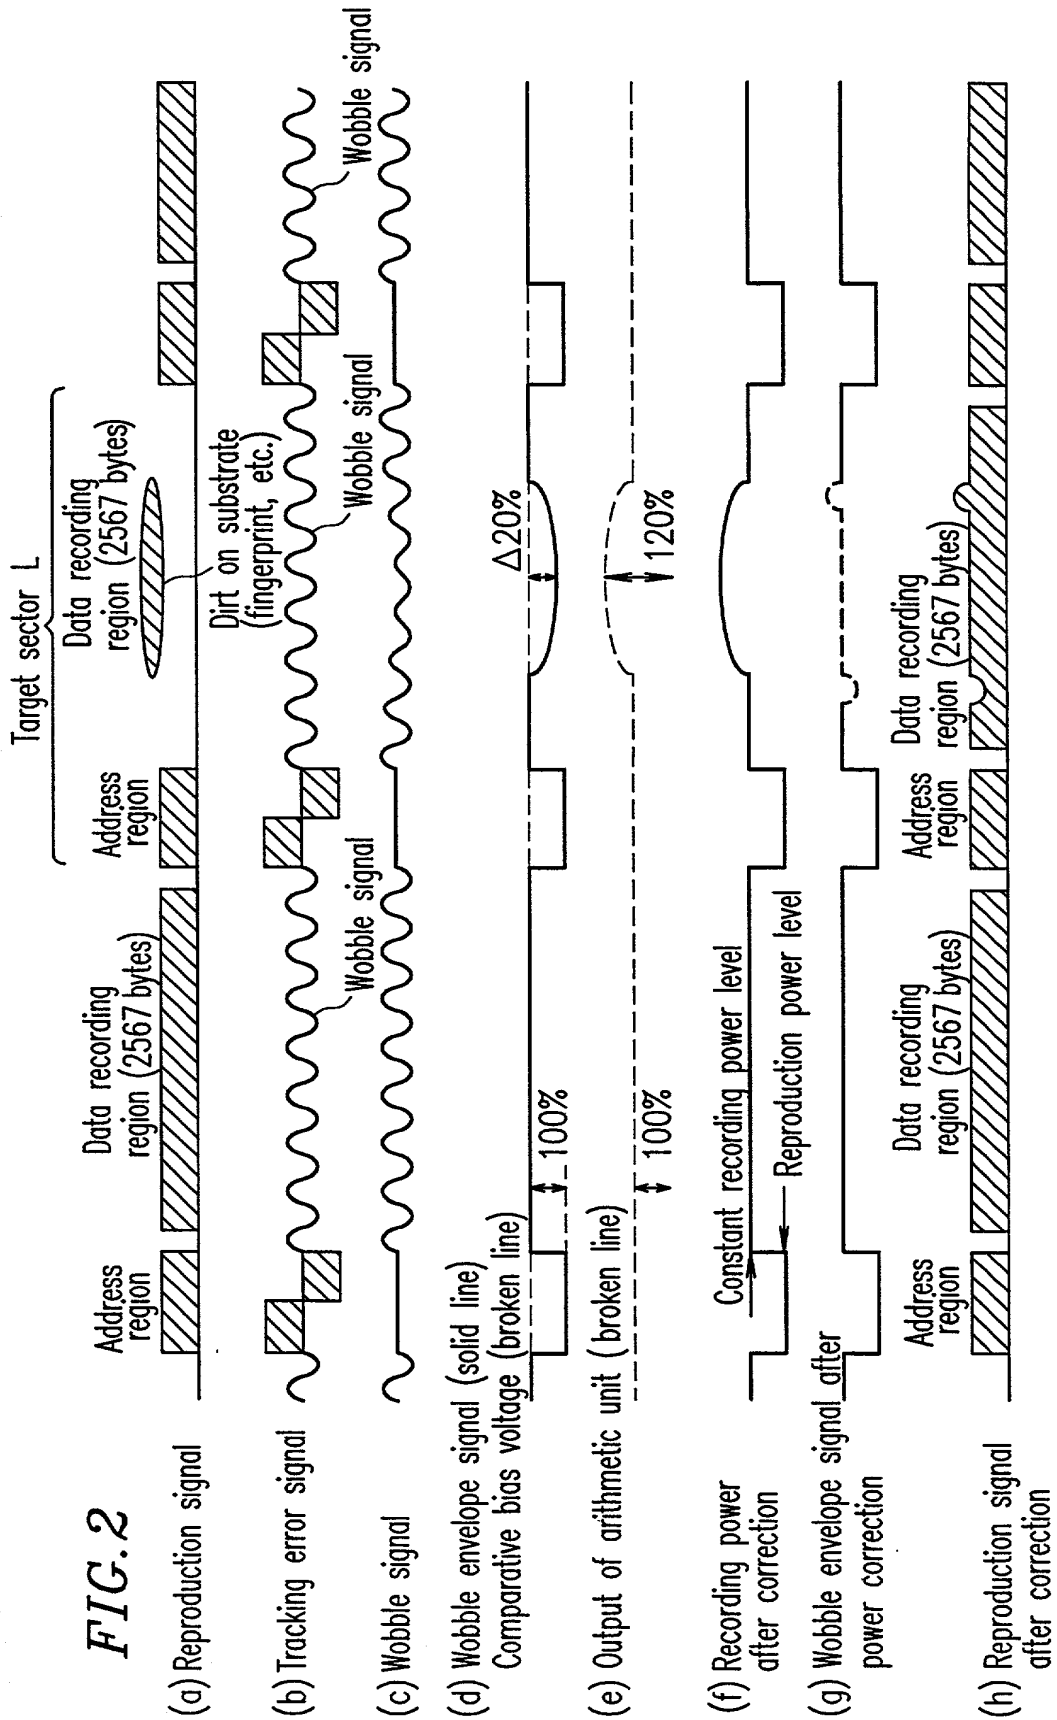

User interface


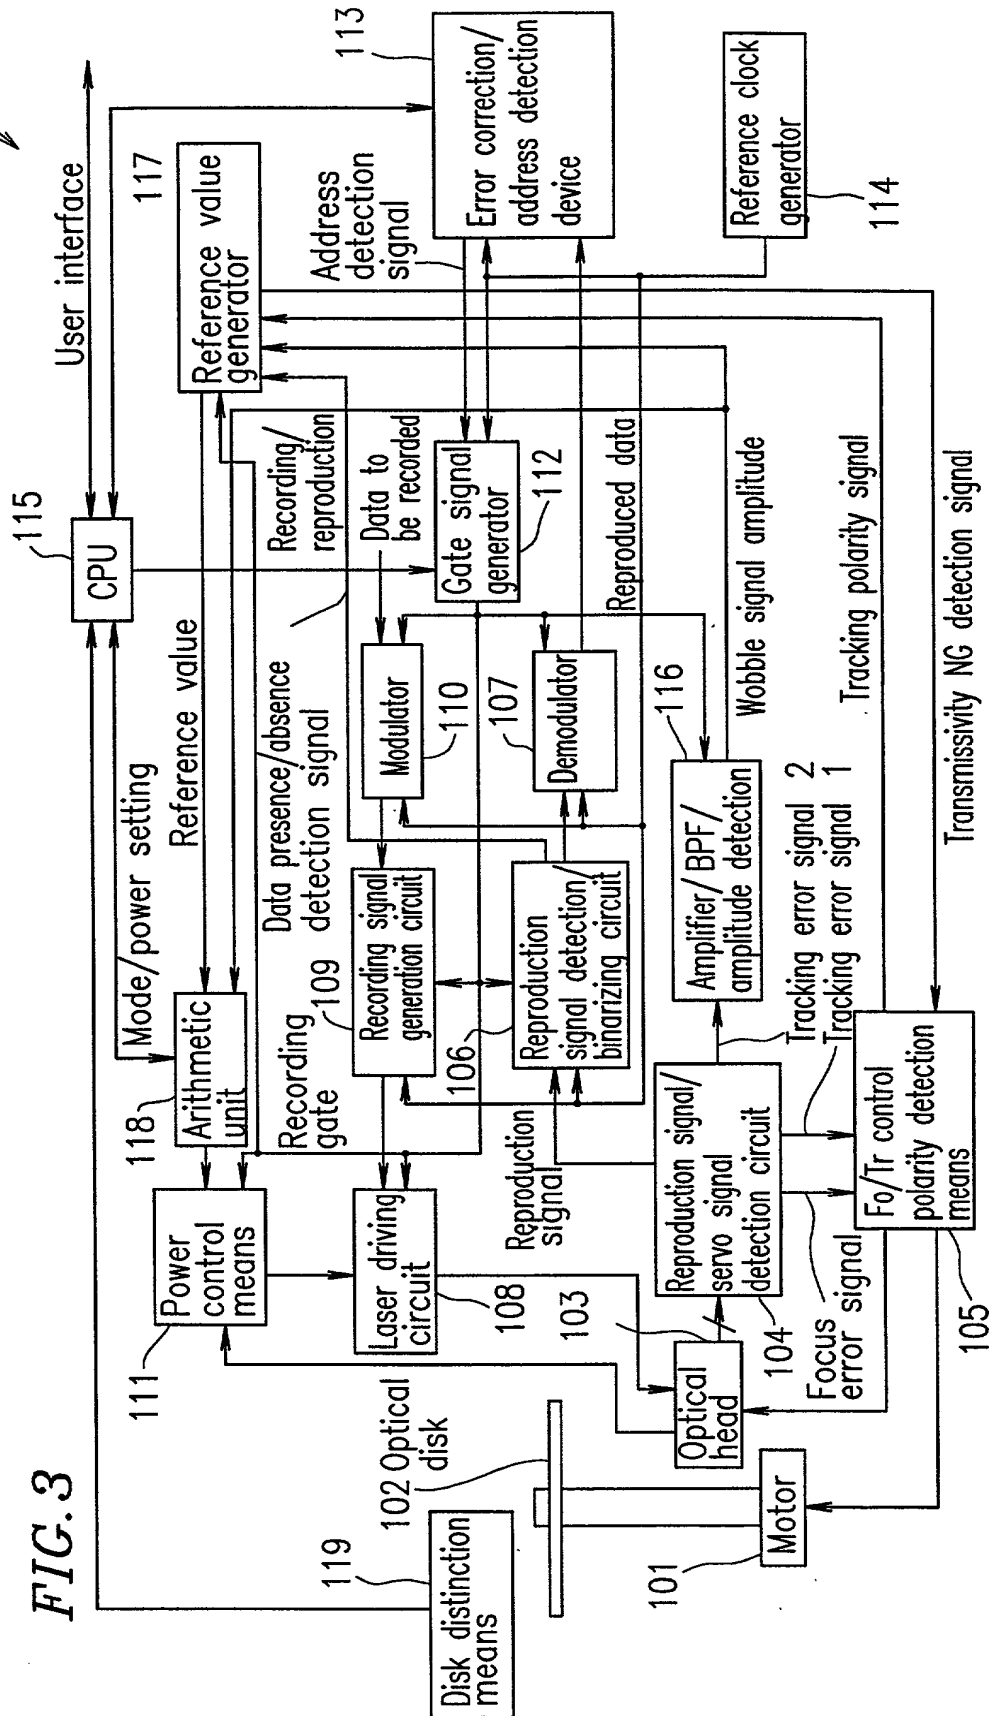


FIG. 4

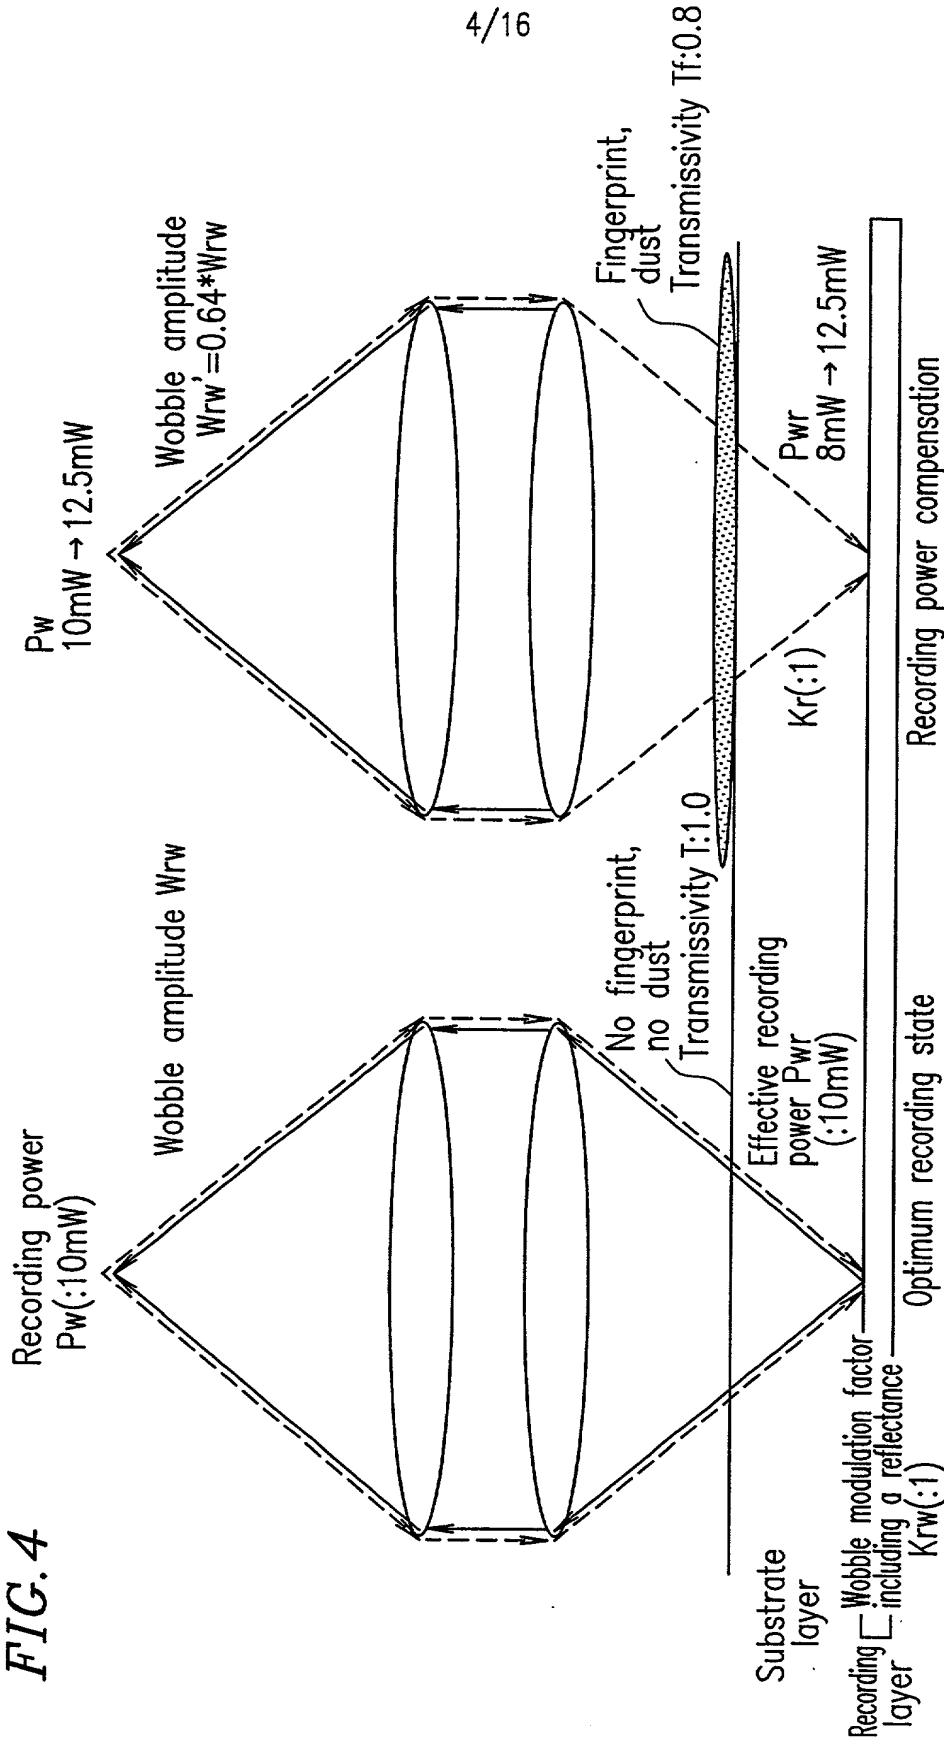

5/19


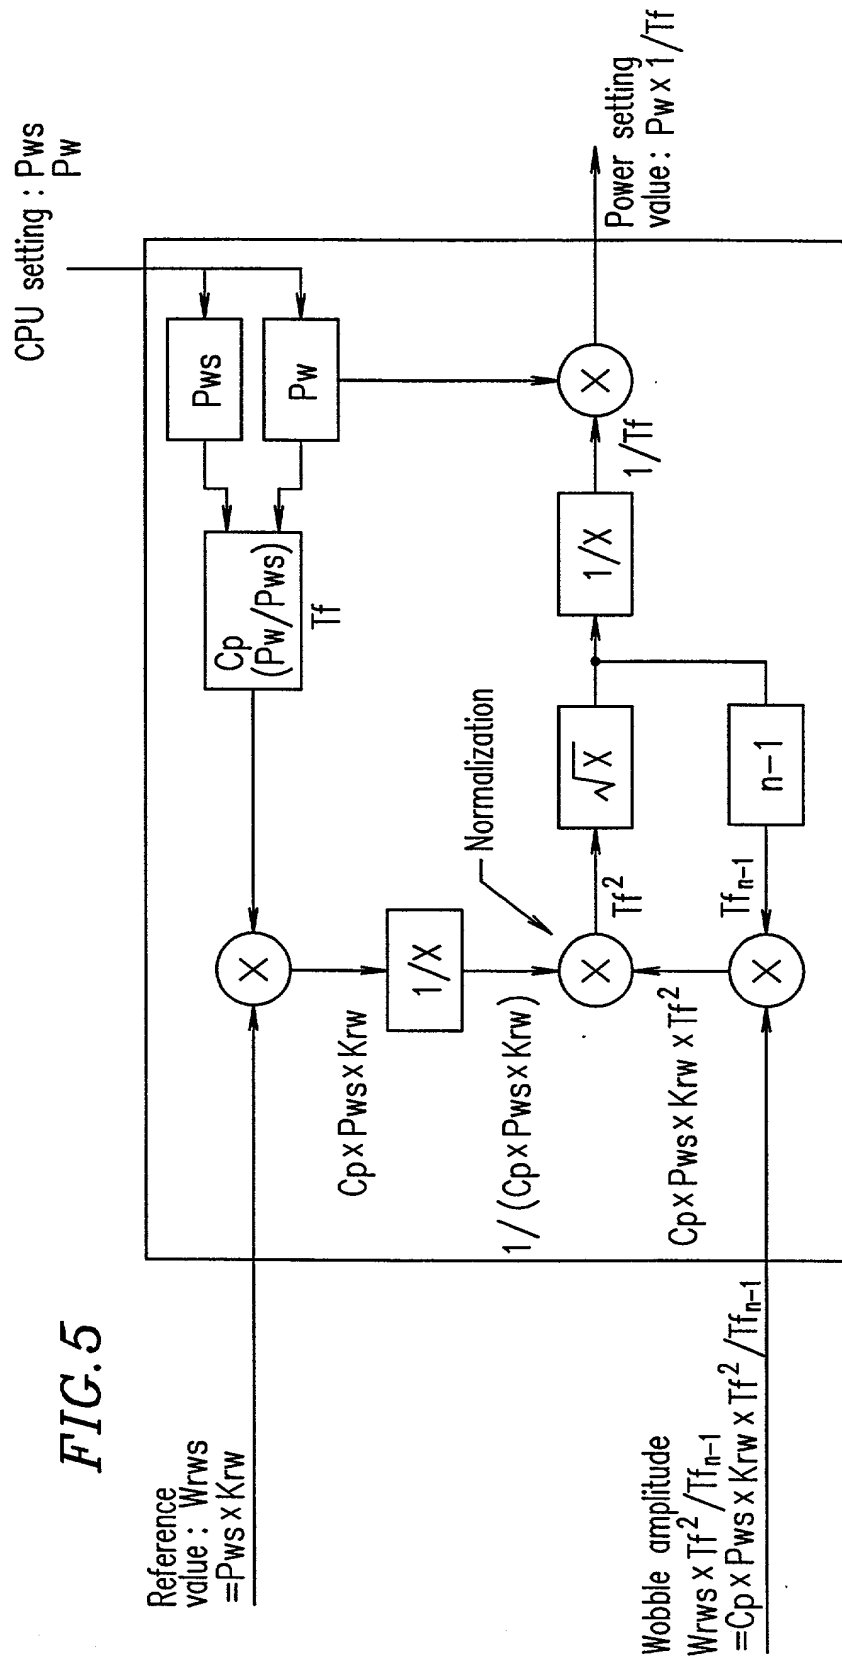


FIG. 6

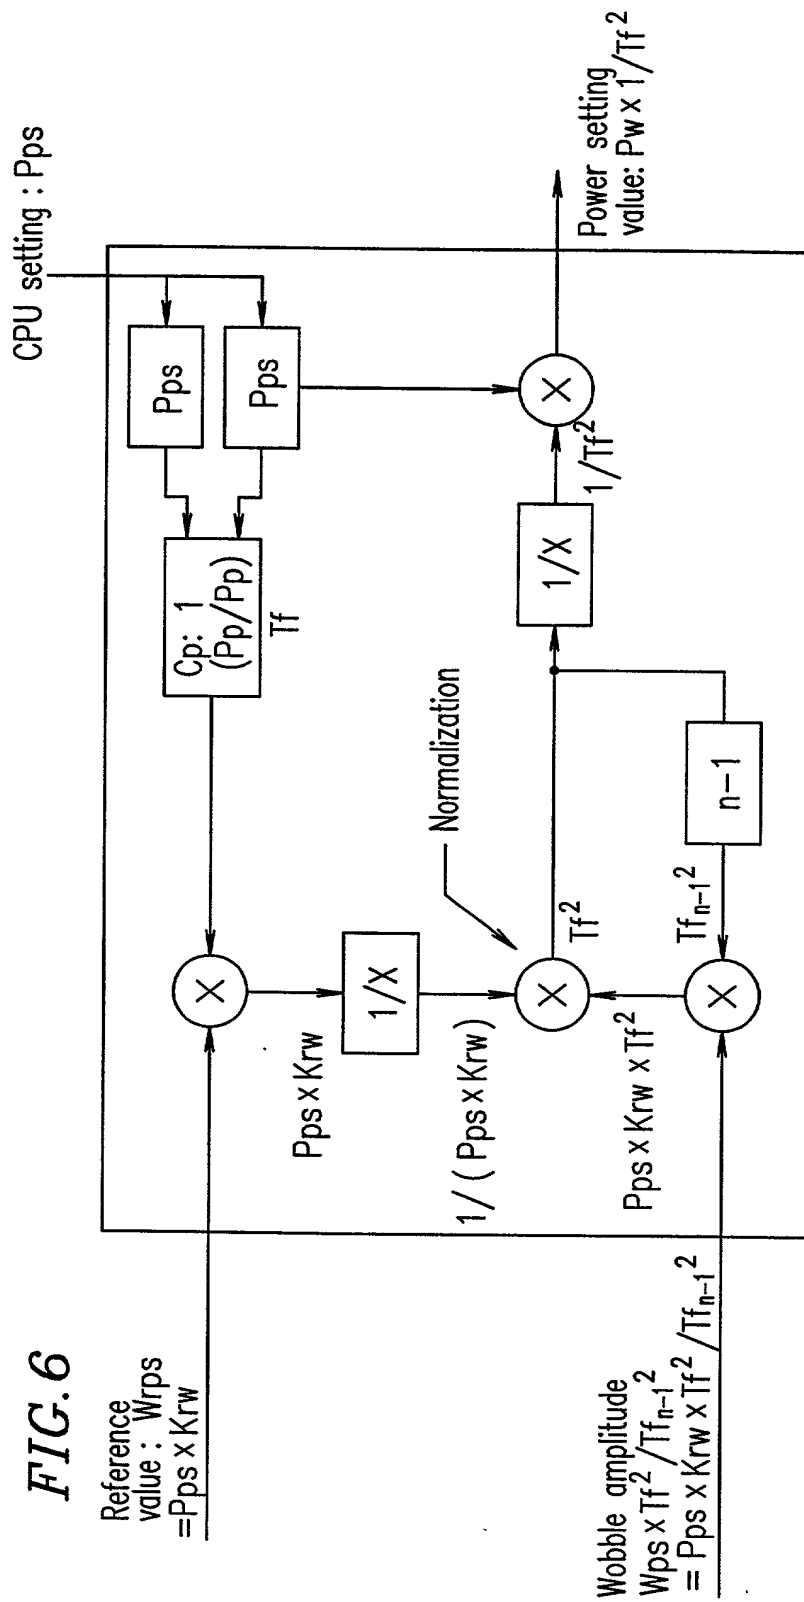

7/16

FIG. 7

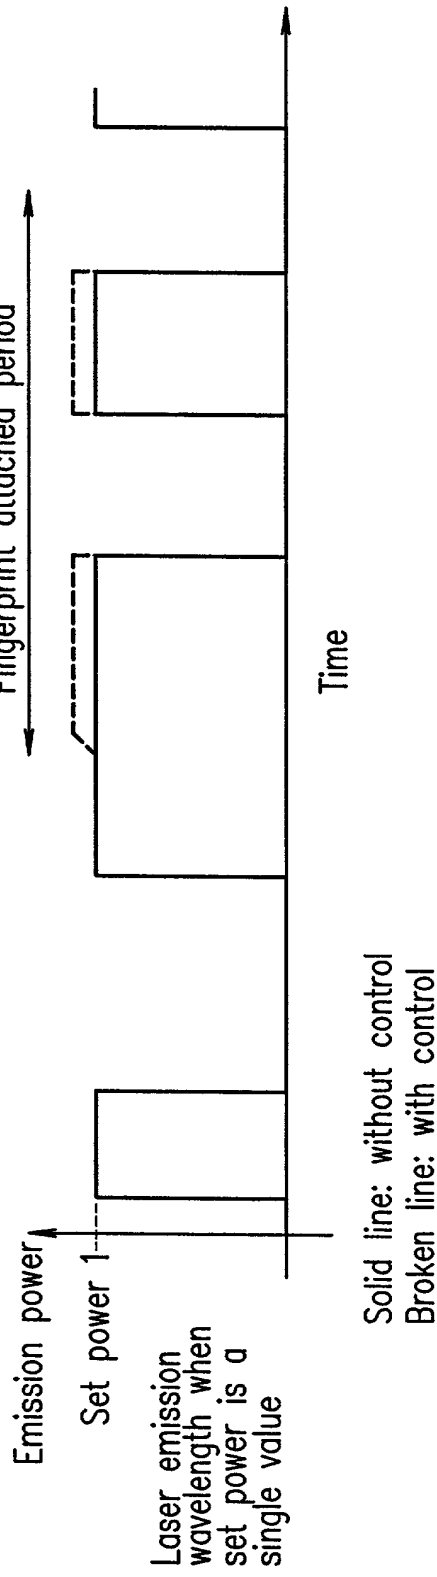


FIG. 8

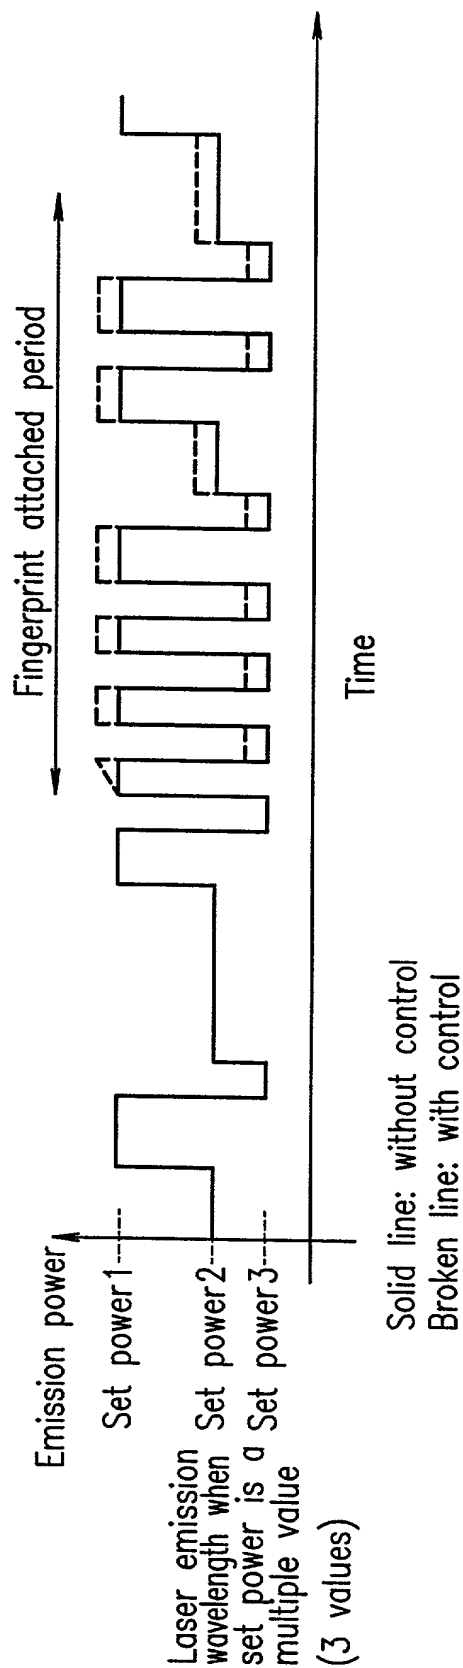
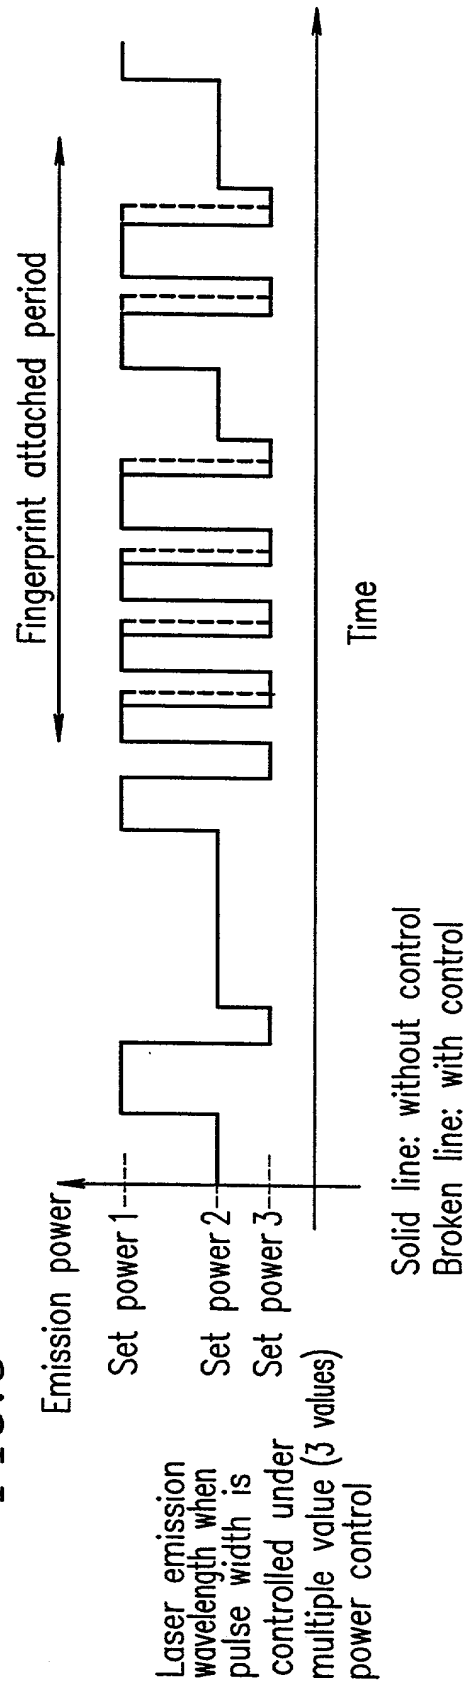
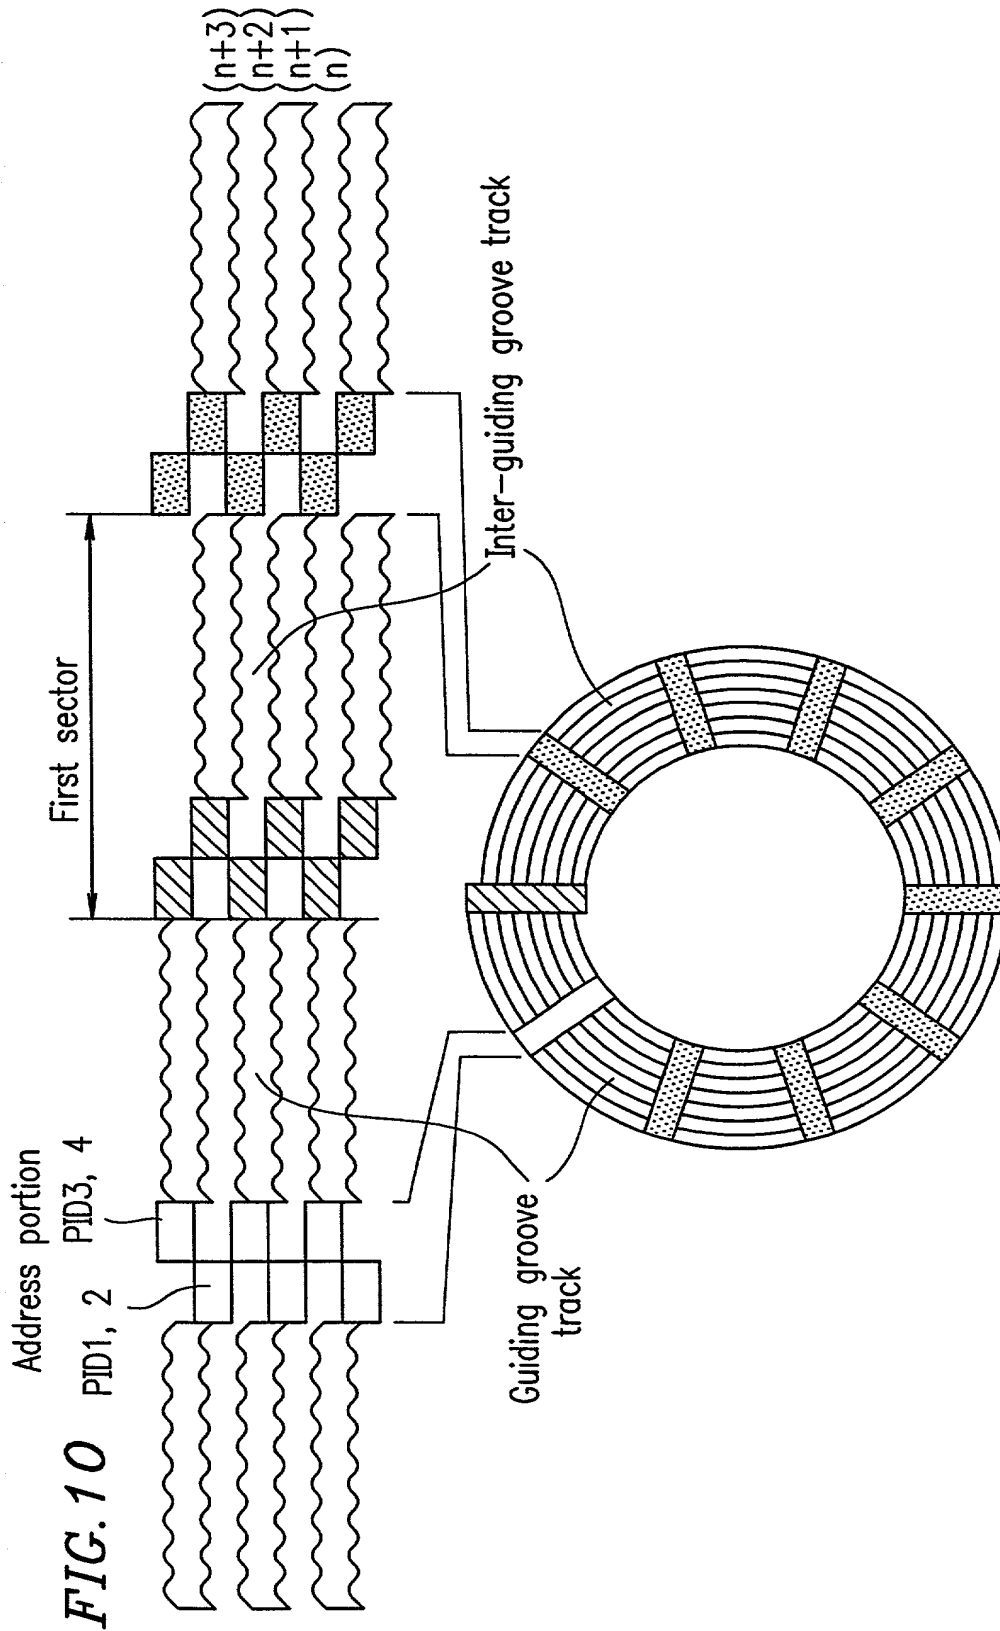


FIG. 9





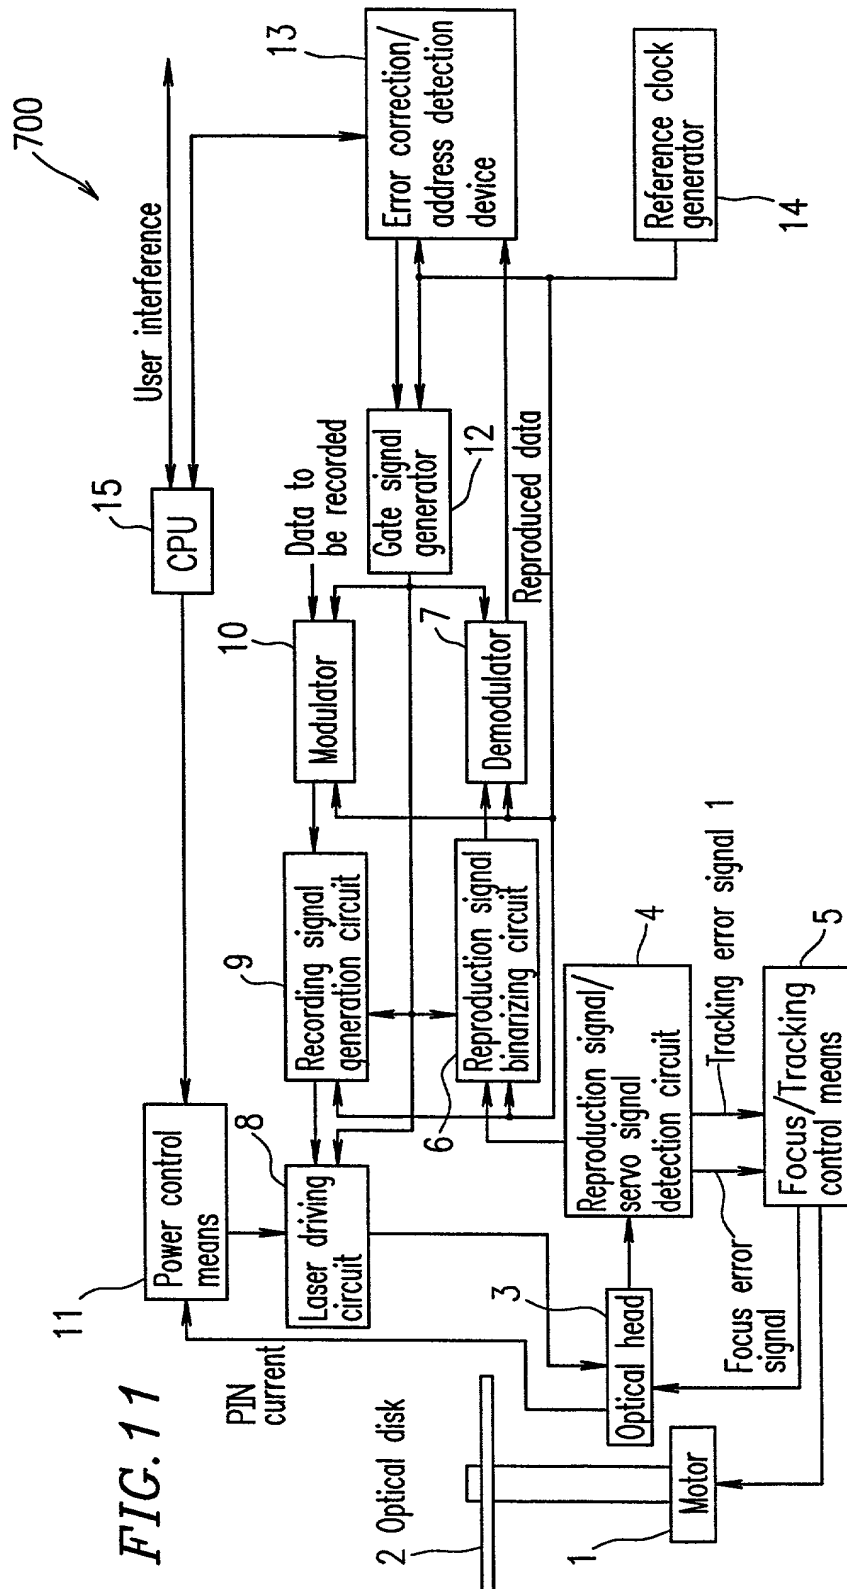


FIG. 12


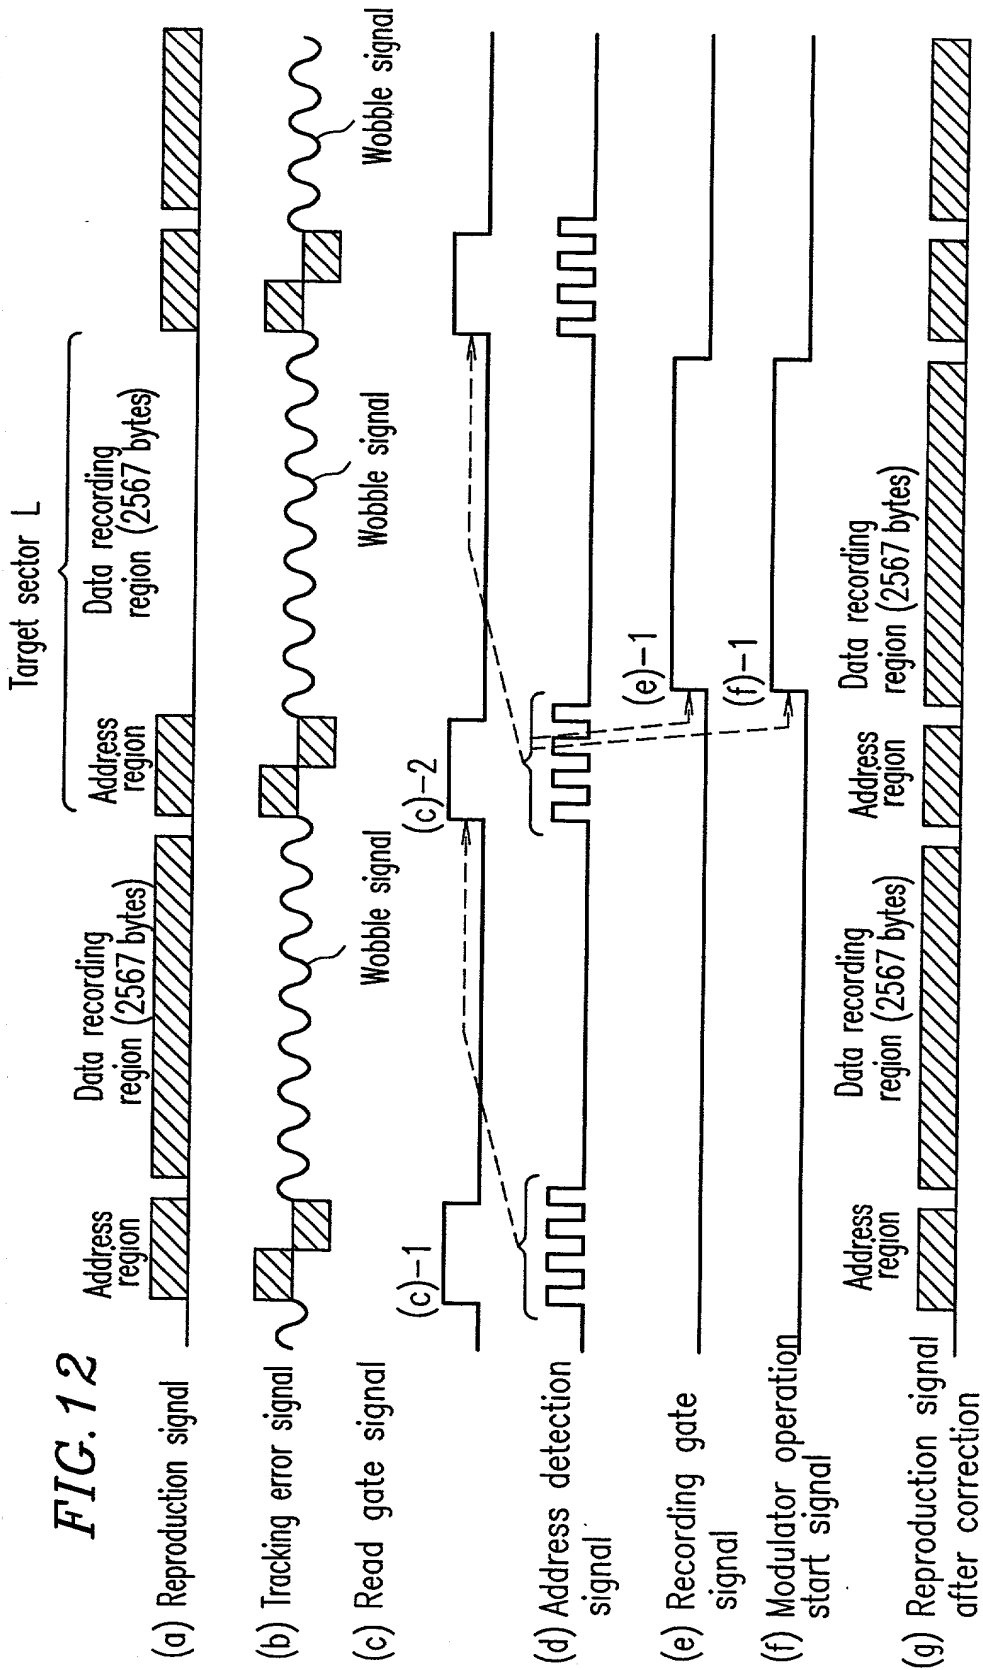


FIG. 13

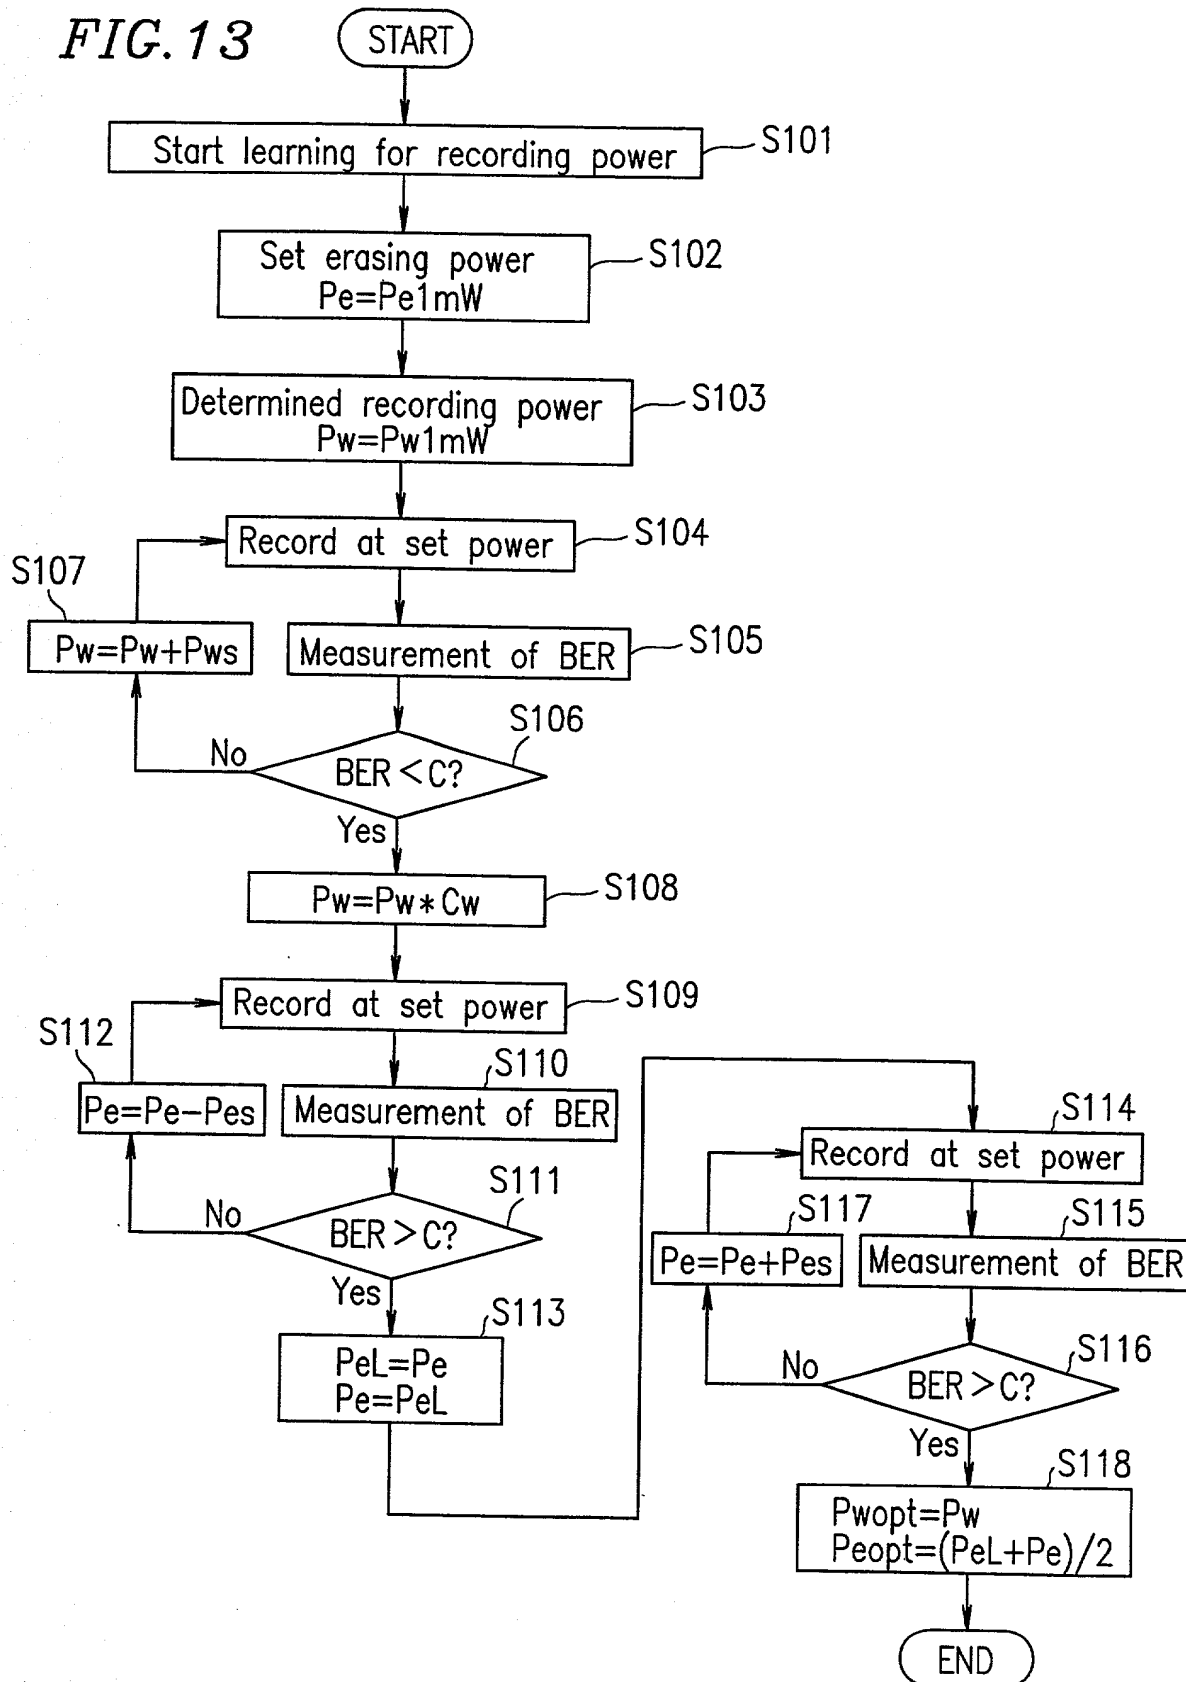

14/16

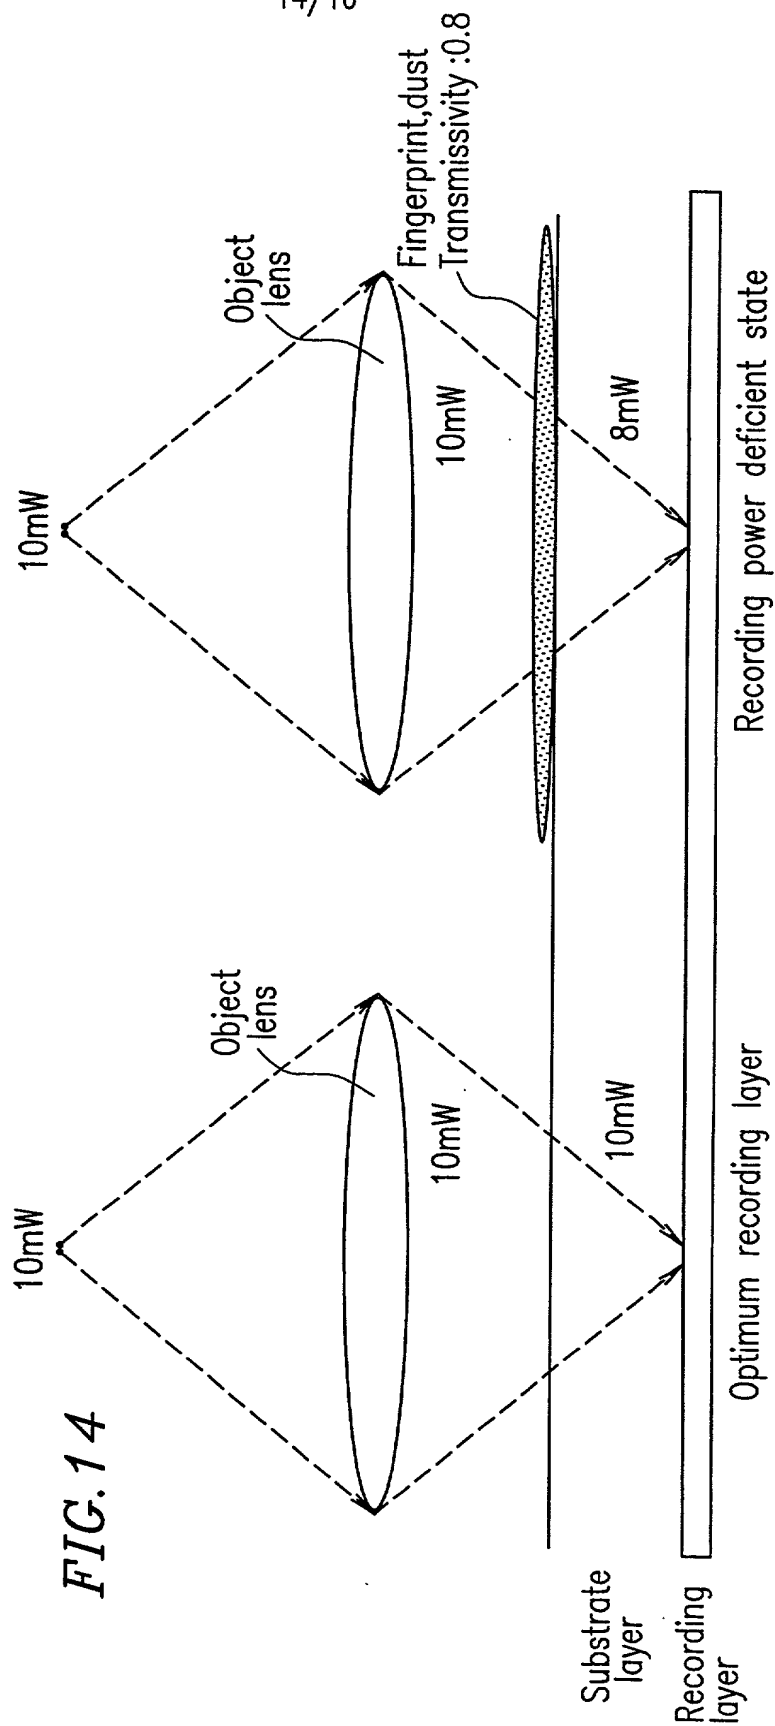


FIG. 14


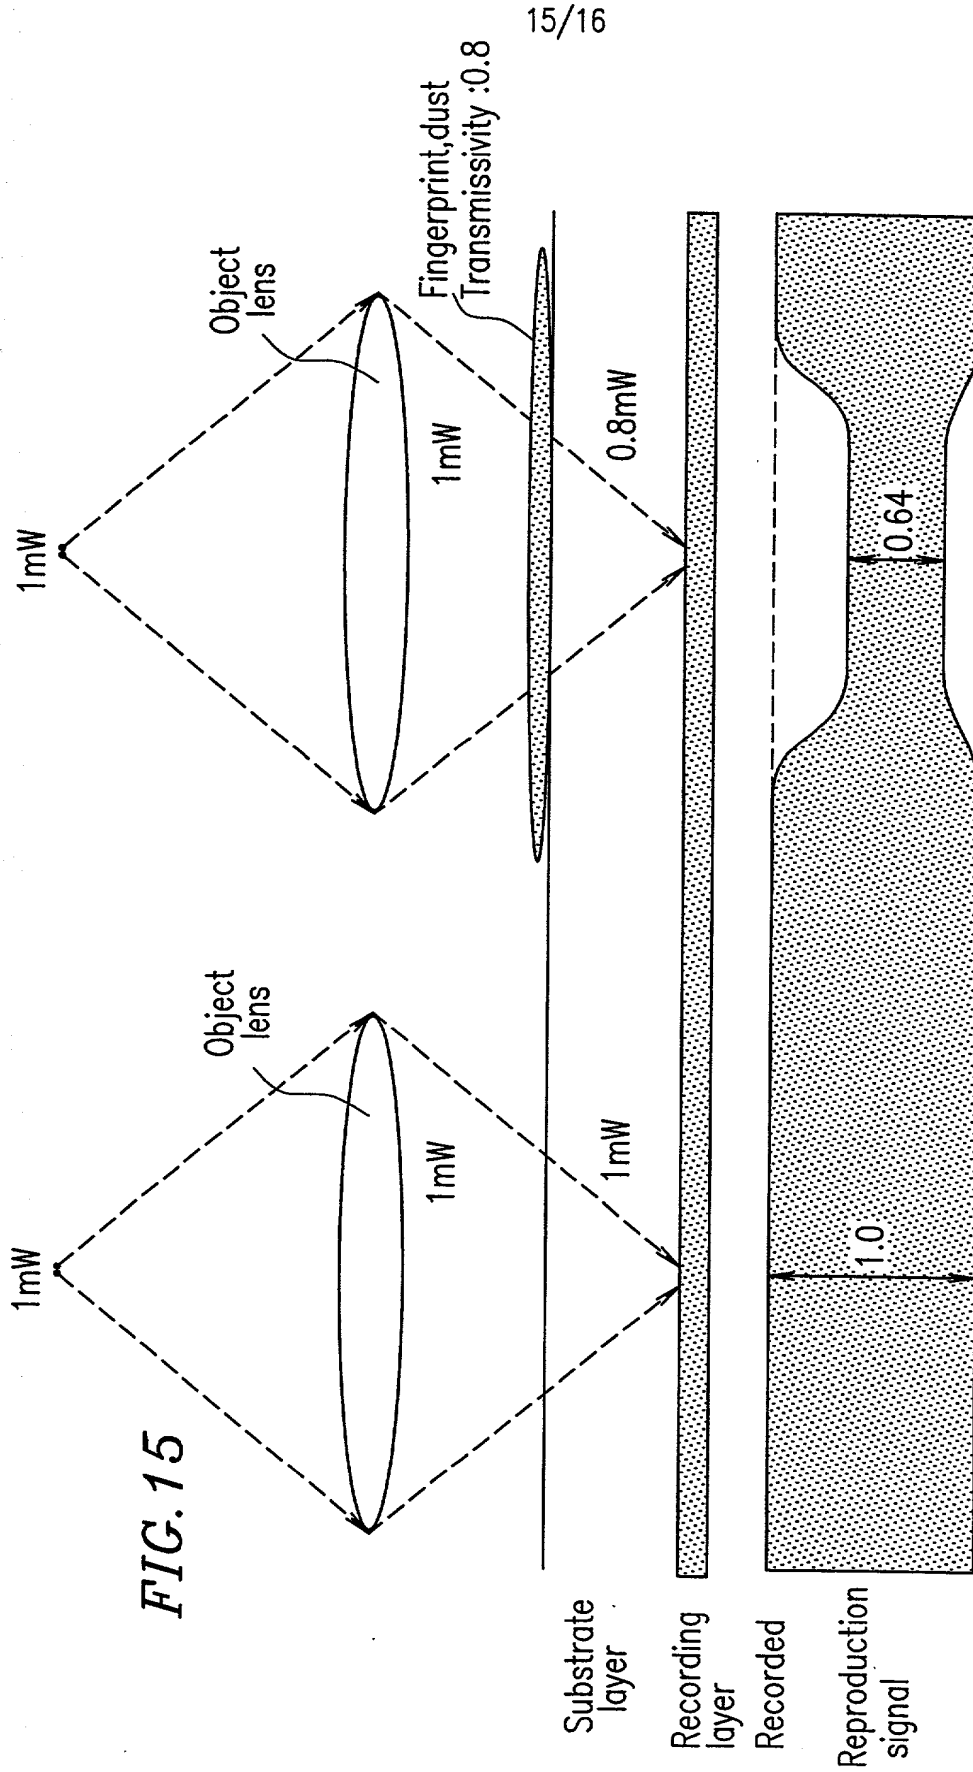


FIG. 16

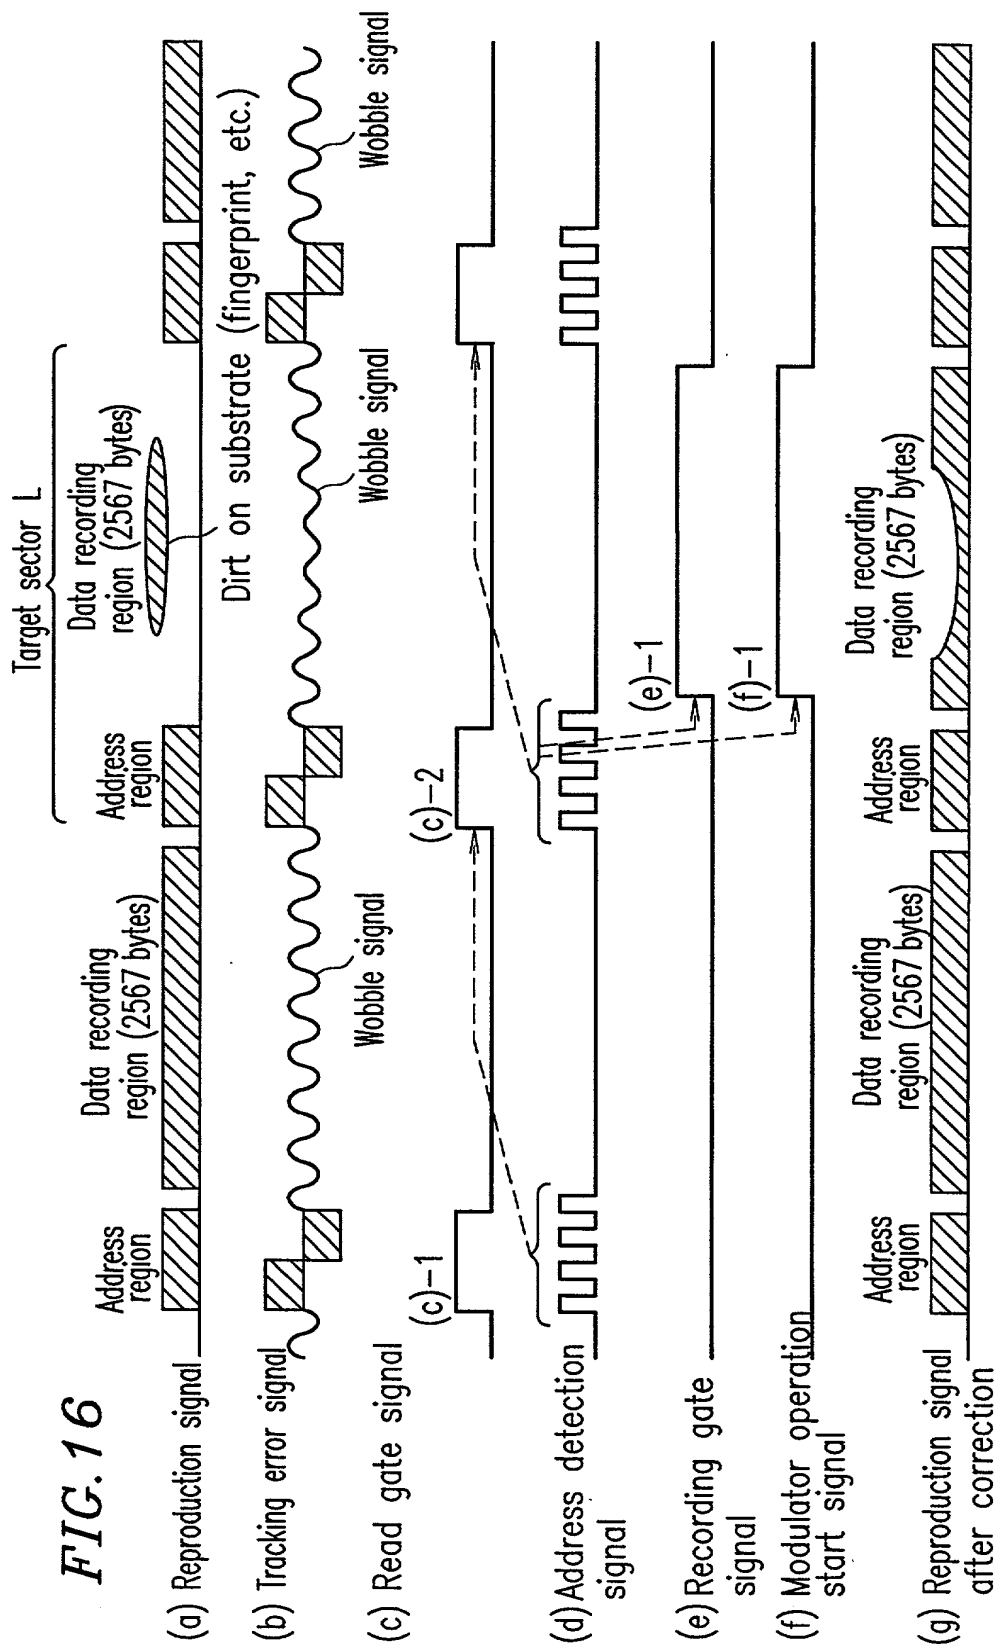

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12/97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input type="checkbox"/> Declaration Submitted with Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16(e)) required)	Attorney Docket Number	28569.8300
	First Named Inventor	Chikashi INOKUCHI, et al.
	COMPLETE IF KNOWN	
	Application Number	09/763,277
	Filing Date	February 20, 2001
	Group Art Unit	
	Examiner Name	To be assigned

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

LASER POWER CONTROL DEVICE AND OPTICAL DISK APPARATUS

the specification of which (Title of the Invention)

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY) 02/20/2001 as United States Application Number or PCT International

Application Number 09/763,277 and was amended on (MM/DD/YYYY) 02/20/2001 (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above:

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PCT/JP99/04506 10-233942 10-364551	PCT	08/20/1999	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Japan	08/20/1998	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Japan	12/22/1998	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12/97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION ---- Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/JP99/04506	08/20/1999	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transmit all business in the Patent and Trademark Office connected therewith:

☒ Customer Number

20322

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner information sheet PTO/SB/02C attached hereto.

Direct all correspondence to:

☒ Customer Number or Bar Code Label

20322

OR

☒ Correspondence address below

Name	Michael K. Kelly					
Address	SNELL & WILMER, LLP					
Address	One Arizona Center, 400 East Van Buren Street,					
City	Phoenix	State	AZ	ZIP	85004-2202	
Country	USA	Telephone	(602) 382-6291		Fax	(602) 382-6070

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])	Family Name or Surname
Chikashi	INOKUCHI

Inventor's Signature	<i>Chikashi Inokuchi</i>				Date	5/8/2001	
Residence: City	Osaka	State		Country	Japan	Citizenship	Japan
Post Office Address	2-17-13, Fujisakamoto-machi, Hirakata-shi, JPX						
Post Office Address							
City	Osaka	State		ZIP	573-0157	Country	Japan

☒ Additional inventors are being named on the 2 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (12/97)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)

Supplemental Sheet

Page 1 of 2

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
<u>Shigeru</u>				<u>FURUMIYA</u>			
Inventor's Signature		<u>Shigeru Furumiya</u>		Date		<u>5/8/2001</u>	
Residence: City		<u>Hyogo</u>	State	Country	<u>Japan</u>	Citizenship	<u>Japan</u>
Post Office Address		<u>1-11-22-2, Tsujii, Himeji-shi, JPX</u>					
Post Office Address							
City		<u>Hyogo</u>	State	ZIP	<u>670-0083</u>	Country	<u>Japan</u>
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
<u>Yoshiyuki</u>				<u>MIYABATA</u>			
Inventor's Signature		<u>Yoshiyuki Miyabata</u>		Date		<u>5/8/2001</u>	
Residence: City		<u>Kyoto</u>	State	Country	<u>Japan</u>	Citizenship	<u>Japan</u>
Post Office Address		<u>5-D9-502, Otokoyamasasatani, Yawata-shi, JPX</u>					
Post Office Address							
City		<u>Kyoto</u>	State	ZIP	<u>614-8372</u>	Country	<u>Japan</u>
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
<u>Yuji</u>				<u>HISAKADO</u>			
Inventor's Signature		<u>Yuji Hisakado</u>		Date		<u>5/8/2001</u>	
Residence: City		<u>Osaka</u>	State	Country	<u>Japan</u>	Citizenship	<u>Japan</u>
Post Office Address		<u>2-1-10-1004, Mattaomiya, Tsurumi-ku, Osaka-shi, JPX</u>					
Post Office Address							
City		<u>Osaka</u>	State	ZIP	<u>538-0031</u>	Country	<u>Japan</u>

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (12/97)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet

Page 2 of 2

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
Atsushi				MIYAZAKI			
Inventor's Signature	Atsushi Miyazaki			Date	5/8/2001		
Residence: City	Kyoto	State		Country	Japan	Citizenship	Japan
Post Office Address	138-8, Shimizu-cho, Hazuka-shi, Fushimi-ku, Kyoto-shi, JPX						
Post Office Address							
City	Kyoto	State		ZIP	612-8485	Country	Japan
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
Toshiya				AKAGI			
Inventor's Signature	Toshiya Akagi			Date	5/8/2001		
Residence: City	Osaka	State		Country	Japan	Citizenship	Japan
Post Office Address	33-19-303, Miyukihigashi-machi, Neyagawa-shi, JPX						
Post Office Address							
City	Osaka	State		ZIP	572-0055	Country	Japan
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.